


Outdoor CAT-5e UTP Cable

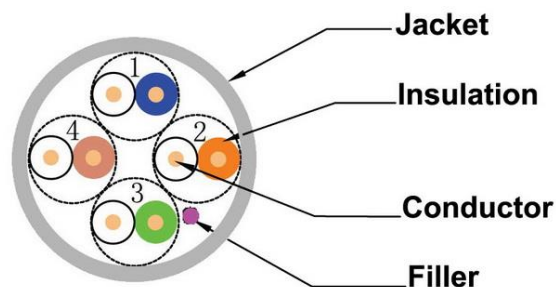

Model	ST-NS-C5E-OD	
Standard	TIA/EIA-568B.2	
Conductor	Material	Copper-clad Aluminum (30% Copper, 70% Aluminum)
	Size	24AWG x 4P
	Construction	1/0.51 ± 0.01mm
Insulation	Material	HDPE (High-density Polyethylene)
	Avg. Thickness	0.21mm
	Diameter	0.92mm±0.03mm
Insulation Color	1 Blue, White/Blue	2 Orange, White/Orange
	3 Green, White/Green	4 Brown, White/Brown
Core Twist	2 Core Twist	
	Overall diameter	3.8±0.20mm
Fi l l e r	Cotton	
Shield	N/A	
Jacket	Material	PE
	Avg. Thickness	0.60 ± 0.05mm
	Diameter	5.4 ± 0.15mm
	Color	Standard: Black, Optional (MOQ: 200): Grey
ELECTRICAL PROPERTIES	Conductor Resistance of Each Pairs	43.6Ω /100M
	Mutual Capacitance	5.6 nF /100M
	Resistance Unbalance	2% MAX
	Capacitance Unbalance	330pF/100M
	Delay Skew	<45 nS
	Propagation Speed	60%
	Frequency	155MHz
	Impedance	100±15 Ω
	Woking Distance	130-150m
Printing	To be confirmed	
Packaging	Pull box	
Product Lengths	305 m/ Reel	

SANNY TELECOM EQUIPMENT CO., LTD

Address: 3rd Floor, Building 3 Section B, Shihuzhou Industrial Zone, Sanshui District, Foshan City, Guangdong Province, China

Cel: +1 561 542 9459

Fax: +86 757 8766 0500

Email: andres.gorlero@sannytelecom.com

Website: www.sannytelecom.com