


Outdoor CAT-6 UTP Cable

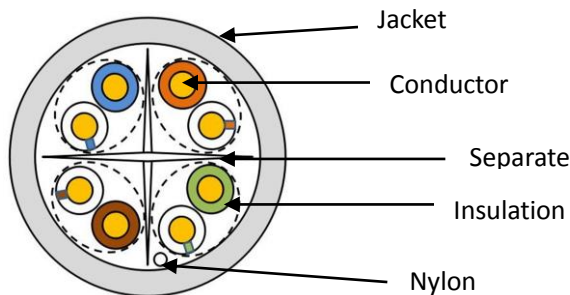

Model	ST-NS-C6-OD		
Standard	TIA/EIA-568B.2		
Conductor	Material	Copper-clad Aluminum (30% Copper, 70% Aluminum)	
	Size	23AWG x 4P	
	Construction	1/0.56 ± 0.008mm	
Insulation	Material	HDPE (High-density Polyethylene)	
	Avg. Thickness	0.21 mm	
	Diameter	0.98mm±0.03mm	
Insulation Color	1	Blue, White/Blue	2 Orange, White/Orange
	3	Green, White/Green	4 Brown, White/Brown
Core Twist	2 Core Twist		
	Overall diameter		5.0±0.20mm
Separate	Material	Polyethylene	Construction 4.6 x 4.6mm
Filler	Nylon		
Shield	N/A		
Jacket	Material	PE	
	Avg. Thickness	0.60 ± 0.05mm	
	Diameter	6.2 ± 0.30mm	
	Color	Standard: Black, Optional (MOQ: 200): Grey	
ELECTRICAL PROPERTIES	Solid Conductor Resistance		≤18Ω /100M
	Mutual Capacitance		5.6 nF /100M
	Resistance Unbalance		4% MAX
	Capacitance Unbalance		330pF/100M
	Delay Skew		<45 nS
	Propagation Speed		70%
	Frequency		250MHz
	Impedance		100±15 Ω
Working Distance		120m	
Printing	To be confirmed		
Packaging	Pull box		
Product Lengths	305 m/ Reel		

SANNY TELECOM EQUIPMENT CO., LTD

Address: 3rd Floor, Building 3 Section B, Shihuzhou Industrial Zone, Sanshui District, Foshan City, Guangdong Province, China

Cel: +1 561 542 9459 Fax: +86 757 8766 0500

Email: andres.gorlero@sannytelecom.com

Website: www.sannytelecom.com