



## 4900-6500MHz 30dBi Dual-Polarity & X-Polarized Dish Antenna

<b>Model</b>	STD6G30M2-PRO-2PK		
<b>Electrical Specifications</b>			
Frequency Range (MHz)	4900-5150	5150-6400	6400-6500
Polarization	Adjustable - Dual Polarized (Vertical and Horizontal) or X-Polarized (+45° and -45°)		
Gain	30 ±1 dBi		
VSWR	≤2.0	≤2.0	≤2.2
Horizontal Beamwidth	4.5°		
Vertical Beamwidth	4°		
F/B Ratio	≥32dB		
Isolation	≥28dB		
Nominal Impedance	50Ω		
Maximum Power	100W		
Lightning protection	DC Ground		
<b>Mechanical Specifications</b>			
Connector	2 x N-Female		
Mounting Mast size	Φ40-70mm		
Dimensions	Φ60cm		
Weight	6.5 KG		
Max. Wind Velocity	210km/h		
Operating Temperature	-40~+60°C		

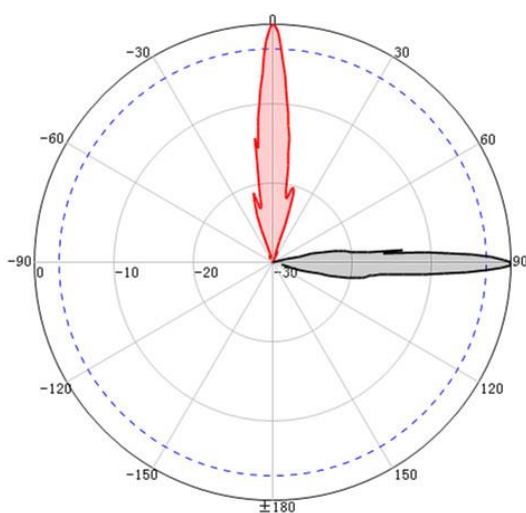

H-Pol

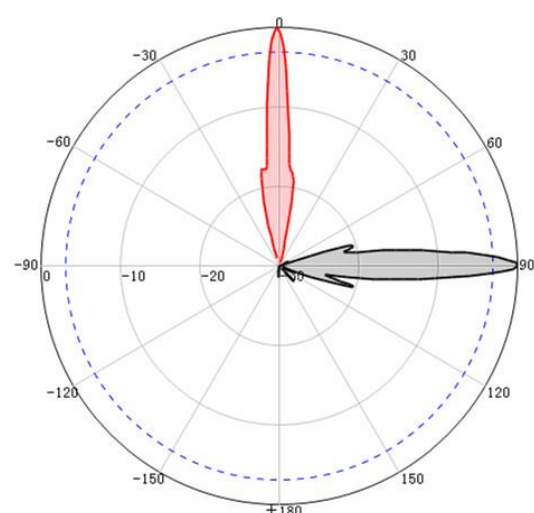

V-Pol

### SANNY TELECOM EQUIPMENT CO., LTD

Address: 3rd Floor, Building 3 Section B, Shihuzhou Industrial Zone, Sanshui District, Foshan City, Guangdong Province, China

Cel: +1 561 542 9459

Email: andres.gorlero@sannytelecom.com

Website: [www.sannytelecom.com](http://www.sannytelecom.com)