



2400-2500MHz 15dBi Dual Polarized Omni Antenna

Model	STO24G15M2
Electrical Specifications	
Frequency Range	2400-2500MHz
Polarization	H+V
Gain	15 dBi
VSWR	≤1.5
Horizontal Beamwidth	360°
Vertical Beamwidth	8°
Port-to-port Isolation	≥30dB
Nominal Impedance	50Ω
Maximum Power	100W
Lightning Protection	DC Ground
Mechanical Specifications	
Connector	2xN-Female
Mounting Type	Mast Mount
Mounting Mast Size	Φ38-60mm
Dimensions	Ø76x1250 mm
Weight	3.5 KG
Max. Wind Velocity	210km/h
Operating Temperature	-40°C to +65 °C

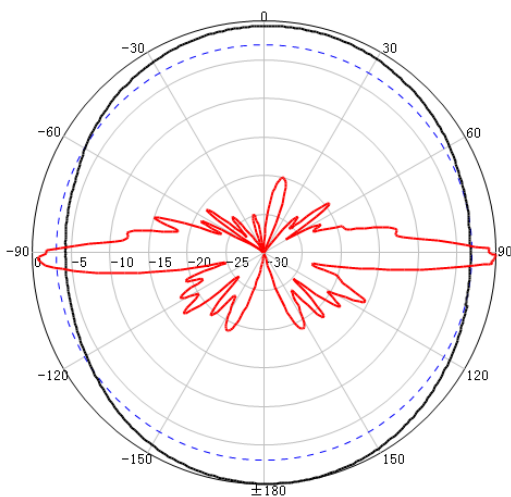

H-Pol @ 2450MHz

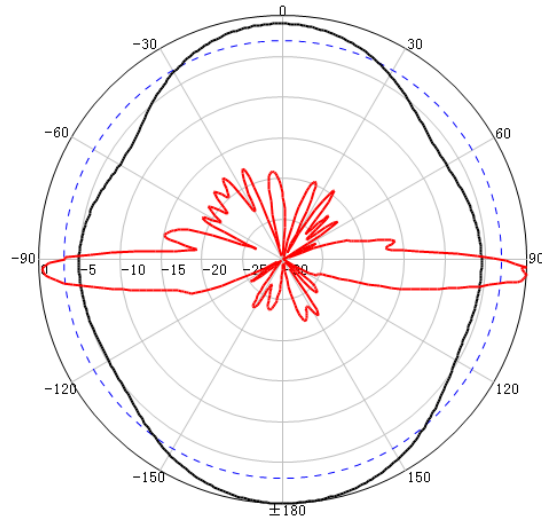

V-Pol @ 2450MHz

SANNY TELECOM EQUIPMENT CO., LIMITED

Address: 3rd Floor, Building 3 Section B, Shihuzhou Industrial Zone, Sanshui District,
Foshan City, Guangdong Province, China

Cel: +1 561 542 9459

Email: andres.gorlero@sannytelecom.com

Website: www.sannytelecom.com