



4900-6500MHz 15dBi 4x4 MIMO Omni Antenna

Model	STO6G15HVM4
Electrical Specifications	
Frequency Range	4900-6500MHz
Polarization	2x (H+V)
Gain	14±1 dBi
VSWR	≤2.0
Horizontal Beamwidth	360°(4x90°)
Vertical Beamwidth	8±2°
Port-to-port Isolation	≧ 28dB
Nominal Impedance	50Ω
Maximum Power	50W
Lightning Protection	DC Ground

Mechanical Specifications	
Connector	4xN-Female
Mounting Type	Mast Mount
Mounting Mast Size	Φ38-60mm
Dimensions	Ø76x510 mm
Weight	2.0 KG
Radome Material	Fiberglass
Max. Wind Velocity	210km/h
Operating Temperature	-40°C to +65 °C

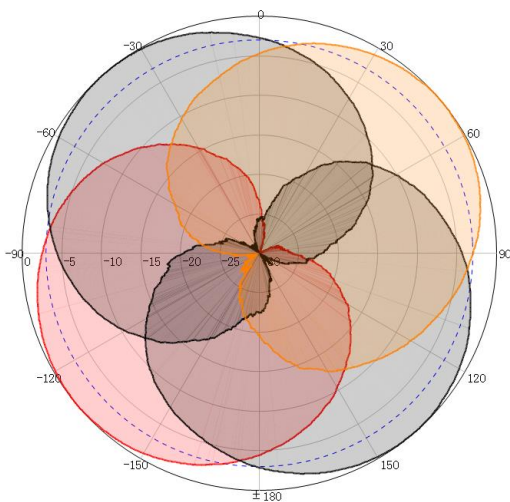

Azimuth patterns

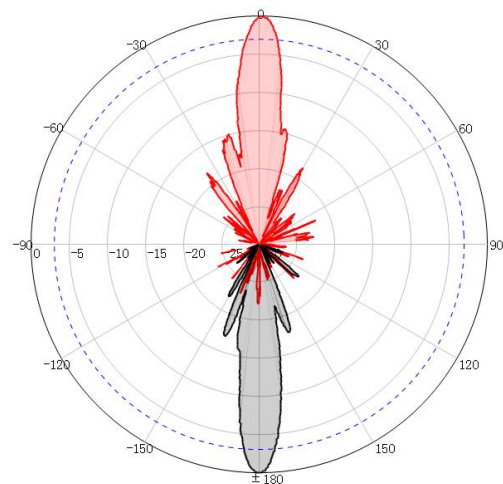

Elevation patterns

SANNY TELECOM EQUIPMENT CO., LIMITED

Address: 3rd Floor, Building 3 Section B, Shihuzhou Industrial Zone, Sanshui District, Foshan City, Guangdong Province, China

Cel: +1 561 542 9459

Email: andres.gorlero@sannytelecom.com

Website: www.sannytelecom.com