




Specifications

ELECTRICAL


Frequency	800-960MHz	1710-2500MHz
Gain	3dBi	5dBi
Beamwidth	360°/ Horizontal 85°/ Vertical	360°/ Horizontal 40°/ Vertical
Polarization	Vertical	
VSWR	≤1.5	
Port Impedance	50Ω	
Maximum input power	50W	
Lightning protection	DC Ground	

MECHANICAL

RF Connection	N-F
Height × Diameter	96 × φ 165mm
Weight	0.25Kg
Radome Material	ABS
Radome Color	White
Operating Temperature	-40~+60℃
Mounting	Ceiling Mount

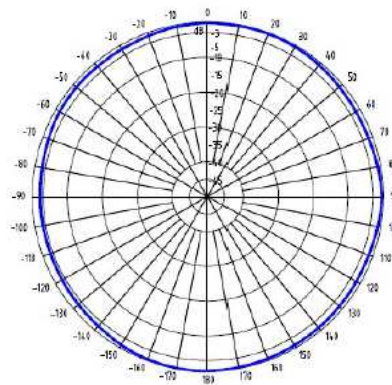

H

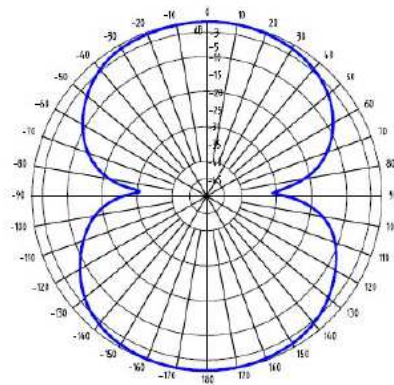

V