

DS-1LH1S2C mini RG59 Siamese Cable

Feature and Function

- Mini RG59 Siamese cable: one coaxial cable and two-core power cord
- Compatible with all CCTV analog systems, transmitting video and power simultaneously, saving wiring and no latency
- Work for 4K/5MP/4MP/1080p/720p, AHD/CVI/TVI/CVBS security CCTV system
- High-purity oxygen-free copper conductor material, featuring excellent transmission performance, easy to install, less construction work
- Flame retardant PVC sheath for weatherproof indoor and outdoor use
- Pre-made cable BNC and DC power connectors, fast connection for camera and back end equipment
- Compliant with RoHS 2.0



Specification

Model		DS-1LH1S2C
Coaxial Cable		
Conductor	Material	oxygen-free copper
	Wire Gauge	28 AWG
	Diameter	7*(0.12 ± 0.008)mm
Insulation	Material	Foam PE
	Diameter	1.6 ± 0.03 mm
Tape	Material	Aluminum foil
	Lapping	bonded
Braid	Material	CCAMX
	Braiding Standard	32*(0.12 ± 0.008)mm
Impedance		75 ohms
Jacket	Material	PVC
	Average Thickness	≥ 0.2mm
Power Cable		
Conductor	Material	CCA
	Wire Gauge	24 AWG
	Diameter	7*(0.20 ± 0.01)mm
Insulation	Material	PVC (red, black)
	Diameter	1.0 ± 0.05 mm
Jacket	Material	PVC
	Average Thickness	≥ 0.2mm
General		
Length		10/20m
Diameter		2.8*5.6 ± 0.1mm
Color		Black
Operating Temperature		-20 ~ 60 °C
Storage Temperature		-10 ~ 50 °C
Flame retardant		VW-1


Available Model

DS-1LH1S2C-10


DS-1LH1S2C-20

Dimensions (mm)

DS-1LH1S2C-10

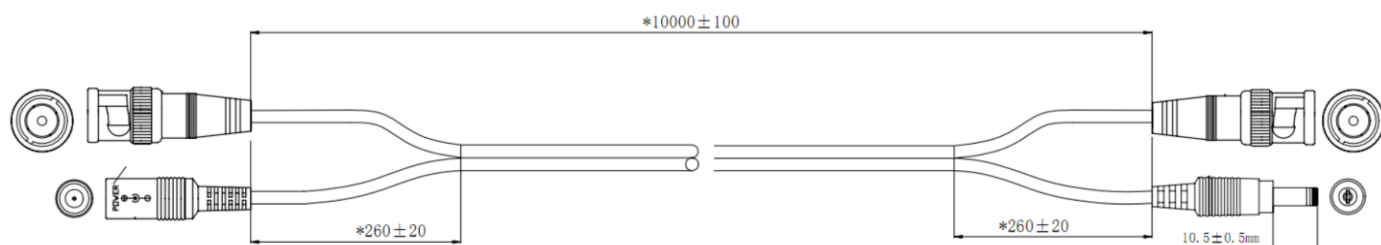

DS-1LH1S2C-20

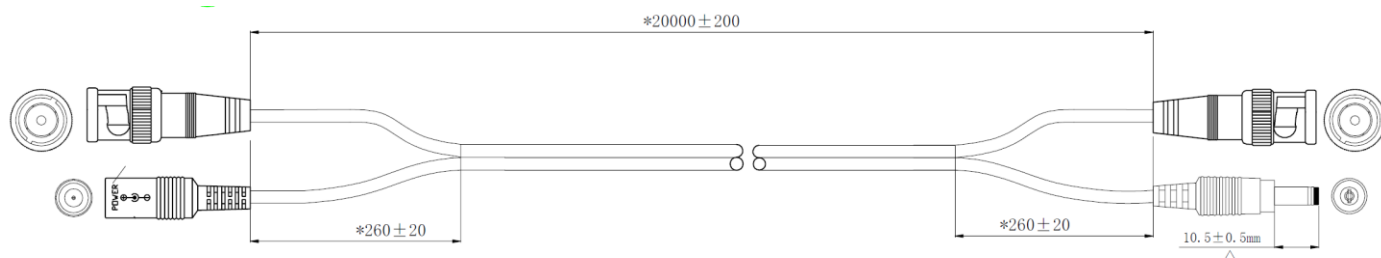

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq