


# FOSC-H4-A-S4 closure

## FOSC-H4-A-S4 mechanical sealing horizontal closure

FOSC-H4 series closure provides 2 in and 2 out cable entrances, up to 72 fiber splice. It has the functions of mid-span, cable branching and fusion splicing, and can be used in duct, aerial, direct buried or manhole installation environment.

### Features

- Horizontal structure, mechanical cable sealing
- Made of polymer modified materials, with strong impact resistance and high performance
- With ideal fiber management design
- IP68 protection level

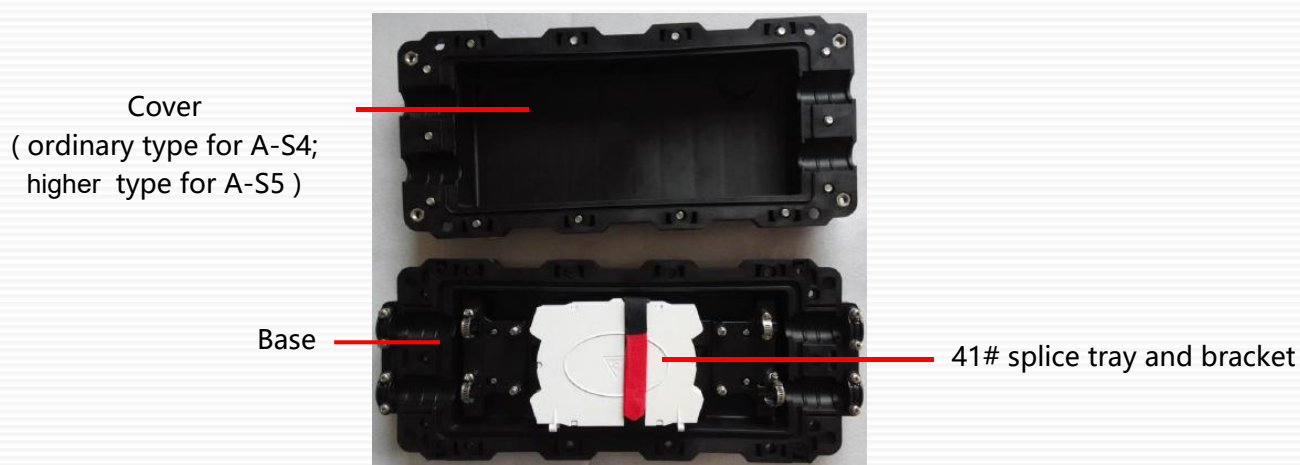

### Specification

- Outdoor applications
- Duct, aerial, direct buried or manhole installation

Item		Parameters
Dimensions (L × W × H) (Unit: mm)		FOSC-H4-A-S4
		473×200×110
Maximum splice capacity (single core)		72
Cable Sealing		Screw/daub ( traditional type, stable property, no re-opening available)
Cable entrance	Type	Round holes
	Quantity	4 (2 in 2 out)
	Suitable cable diameter (mm)	Φ10 ~ Φ20
Temperature range (°C)		-40~65
Color		Black