


Version	Explain	Date
A		2015. 10. 17

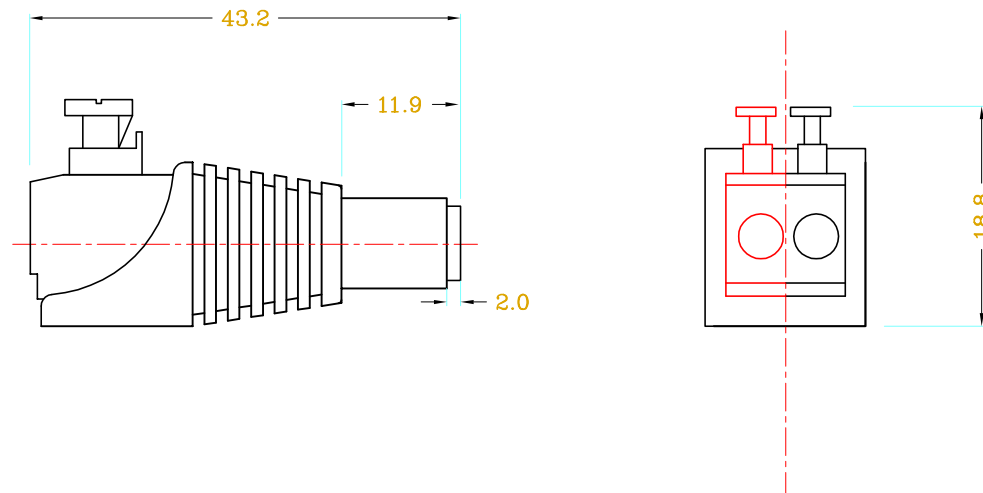

Material

Housing:0A66 UL94V-0

Pin header:Brass,Tin-Plated

Screrw:Steel.ZincPlated

Electrical

Rated Voltage:300V

Rated current:10A

Contact resistance:20m Ω

Withstanding Voltage:2000V/Min

Insulation Ressistance:5000m Ω /DC1000V

Mechanical&operating ambient

Wire Range :26-14AWG

Strip length: 6-7mm

Temp. Range: -40° C/+105° C

AX soldering: +250° C 5Sec

epcom®
POWER ⚡ LINE

general tolerance		CUSTOMER:		CUST NO:	
X	±0.1	PRODUCT NO:		PART NO:	
X.X	±0.05	Adaptador tipo jack de 3.5 mm hembra con terminales de presión		JR53X	
X.XX	±0.005				
X.XXX	±0.0002	DRAWN BY		DRAWING SIZE	
/	/	CHECKED BY		UNIT	mm
/	/	APPROVED BY		PAGE	1 OF 1
/	/	SORTING NO.			