
CONECTOR LC/UPC MULTIMODE

Modelo: LP-MM-LCUPC

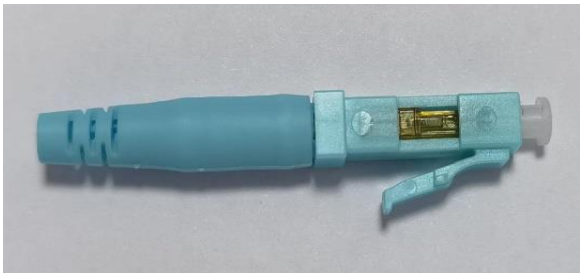

Product structure

Quick Assembly LC connector can provide quick and easy terminations of fibers in the field. It allows the installer to terminate and make connection in minutes at equipment and fiber patch panels. This connector system with features of high installation quality, high success rate and high reliability

Optical caracteristics

LP-MM-SC-UPC	
Applicable for	2 mm, 3 mm , round:900um
Fiber mode	Multi mode MO1(62.5um), MO2 , MO3, MO4（50/125μm）
Operation time	About 50s (No fiber cut)
Max Insertion Loss	≤ 0.5 dB
Insertion Loss Typical Value	≤ 0.3 dB
Return Loss	dB ≥25
Tensile Strength N	> 50 N
Operating temperature	-40°C a 85°C
Reusable	≥5 times
On-line tensile stength (20 N)	dB IL ≤ 0.25
Mechanical durability (500 times)	dB IL ≤ 0.25
Drop-off test(drop-off height4m,once per direction, totally 3 times)	dB IL ≤ 0.25