


## Category 6 UTP Cable for Outdoor Use

Part Number:PROCAT6GELX

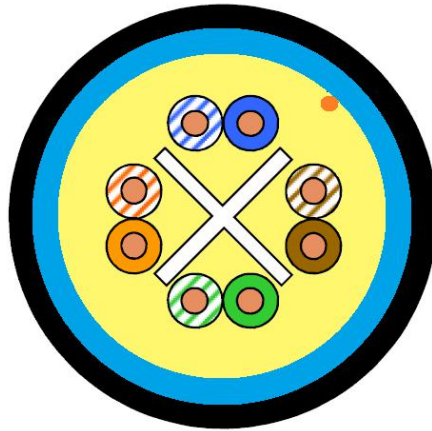

### Application

Voice, Data, Security and Video Applications.  
IP Megapixel CCTV/Analog Installations  
Wire Access Points  
Gigabit Indoor Video/data installations  
Long distance PoE feeding  
Generic cabling systems. Outdoor installations. Filled with compound to prevent water penetration

### Standards

ANSI EIA/TIA 568 C.2;  
ISO/IEC 11801 2<sup>nd</sup> Edition; IEC 61156-5  
EN 50173; EN 50288-3-1  
IEEE 802.3at  
UL - E472815  
ETL

### Water Proof Rating

EN 50289-4-2

### Construction

Conductor	Bare copper wire (AWG23/1)
Insulation	Polyethylene, $\varnothing 1.04 \pm 0.02$ mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core, with cross separator
Filling	Jelly Compound to prevent moisture migration.
Inner Sheath CM	PVC Grey RAL 5015
Outer Sheath	Black LDPE UV RATED

### Mechanical properties

Minimum bending radius	Installation	10 x D
Temperature range	Installed	5 x D
	during operation	-40 °C ~ + 70 °C
	during installation	-20 °C ~ + 50 °C

## Electrical properties @ 20 °C

Dielectric strength	2.5 KV dc-2 seconds
Conductor resistance	Max 7.00 ohm/100M at 20°C
Max. Ring resistance	16.8 Ohm/100M at 20°C
Max. Mutual capacitance	560 pf/100M
Max. Capacity unbalance	330 pf/100M
Mean characteristic impedance 100 MHz	100 ± 15 Ω
Nominal velocity of propagation	approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core Coupling attenuation	≥ 50 dB

## Nominal transmission characteristics @ 20 °C

Frequency (Mhz)	Impedance (Ω)	RL (dB)	ATT (dB/100)	NEXT (dB)	PS.NEXT (dB)	ELFEXT (dB)	PS-ELFEXT (dB)
0.772	100±15	19.44	1.84	76	74	70	67
1	100±15	20	2.04	74.3	72.3	67.8	64.8
4	100±15	23.01	3.81	65.3	63.3	55.8	52.8
10	100±15	25	5.99	59.3	57.3	47.8	44.8
16	100±15	25	7.6	56.2	54.2	43.7	40.7
20	100±15	25	8.52	54.8	52.8	41.8	38.8
25	100±15	24.32	9.57	53.3	51.3	39.8	36.8
31.25	100±15	23.64	10.74	51.9	49.9	37.9	34.9
62.3	100±15	21.54	15.48	47.4	45.4	31.9	28.9
100	100±15	20.1	19.92	44.3	42.3	27.8	24.8
125	100±22	19.42	22.49	42.8	40.8	25.9	22.9
200	100±22	18	29.15	39.8	37.8	21.8	18.8
250	100±32	17.32	33.04	38.3	36.3	19.8	16.8
300	-	-	36.10	41.0	38.0	32.0	30.0
400	-	-	41.70	39.0	36.0	30.0	28.0

## Product Code Table

Product Description	Packing Length	Part Number
23AWG Cat.6 UTP 4P Blue PVC+LDPE Black Water Proof	1000ft Wooden Drum	PROCAT6GELX
23AWG Cat.6 UTP 4P Blue PVC+LDPE Black Water Proof	500ft Wooden Drum	PROCAT6GELX/500

© SYSCOM, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Syscom: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Syscom. The information is believed to be correct at the time of issue. Syscom reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Syscom.



## Cable ID: PROCAT6GELX-EHLX003



## Test Summary: PASS

Date / Time: 04/29/2017 07:30:18am  
 Headroom: 7.3 dB (NEXT 12-36)  
 Test Limit: TIA Cat 6 Perm. Link  
 Cable Type: Cat 6 UTP


Operator: Your Name  
 Software Version: 2.7400  
 Limits Version: 1.9300  
 NVP: 69.0%

Model: DTX-1800  
 Main S/N: 1739303  
 Remote S/N: 1739304  
 Main Adapter: DTX-PLA002  
 Remote Adapter: DTX-PLA002



Wire Map (T568B)  
**PASS**





Length (ft), Limit 295	[Pair 78]	296
Prop. Delay (ns), Limit 498		456
Delay Skew (ns), Limit 44		20
Resistance (ohms)	[Pair 78]	12.4
Insertion Loss Margin (dB)	[Pair 36]	3.9
Frequency (MHz)	[Pair 36]	249.5
Limit (dB)	[Pair 36]	31.1





	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	12-78	12-36	36-45	12-36
<b>NEXT (dB)</b>	7.4	7.3	7.9	7.3
Freq. (MHz)	110.0	174.5	250.0	232.5
Limit (dB)	41.2	37.9	35.3	35.9
Worst Pair	36	36	36	12
<b>PS NEXT (dB)</b>	6.8	8.2	6.8	8.6
Freq. (MHz)	250.0	195.5	250.0	237.0
Limit (dB)	32.7	34.5	32.7	33.1





	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	36-45	45-36	78-12	12-78
<b>ACR-F (dB)</b>	5.8	5.8	5.9	6.3
Freq. (MHz)	12.5	12.5	230.0	230.0
Limit (dB)	42.3	42.3	17.0	17.0
Worst Pair	36	36	12	78
<b>PS ACR-F (dB)</b>	8.0	8.5	8.5	8.6
Freq. (MHz)	1.0	12.5	230.0	230.0
Limit (dB)	61.2	39.3	14.0	14.0



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>N/A</b>				
Worst Pair	12-78	12-36	36-45	12-36
<b>ACR-N (dB)</b>	9.2	10.2	11.8	11.3
Freq. (MHz)	12.9	174.5	250.0	237.0
Limit (dB)	49.8	12.6	4.2	5.6
Worst Pair	12	78	36	36
<b>PS ACR-N (dB)</b>	9.7	10.5	10.7	12.7
Freq. (MHz)	12.8	7.3	249.5	237.0
Limit (dB)	47.5	53.0	1.7	2.9



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	36	78	45	45
<b>RL (dB)</b>	6.4	6.5	7.7	8.6
Freq. (MHz)	132.5	4.6	239.5	248.5
Limit (dB)	12.8	21.0	10.2	10.0



Compliant Network Standards:  
 10BASE-T                      100BASE-TX                      100BASE-T4  
 1000BASE-T                    ATM-25                              ATM-51  
 ATM-155                        100VG-AnyLan                    TR-4  
 TR-16 Active                    TR-16 Passive

LinkWare Version 6.2

