


ODU19T-A48-A ODF Sub-rack

Features

- 19 inch standard chassis
- Supports maximum 4 pieces 12F splice and termination trays
- Equipped with stripping and fixation fitting for optical cable
- Provides 48 cores splice and termination capacity
- Suitable for installation in GPX260 series ODF provided by FiberHome

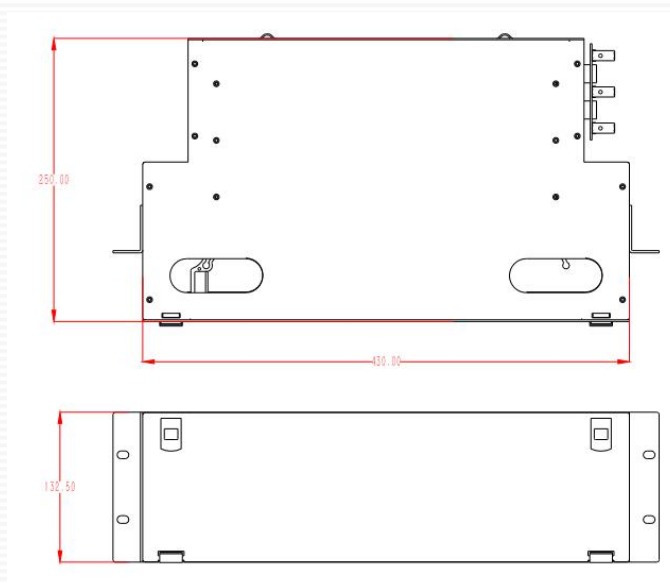

Specification

Item	Parameter
Dimension (mm)	19" x 250 x 3U
Weight (kg)	1.8~2.3
Splice tray (optional)	Intergrated splice and termination tray Max. 12 SC/UPC adapters
Number of splice tray	1~4 pcs
Max capacity	48 cores
Salt spray	96 hours