

Electrical Specifications

- Input Voltage 12 - 57 VDC (Max.)
- Output Voltage 12 - 57 VDC (Max.)


Physical Specifications

- Ports PoE and LAN (2 x RJ45)
- Data Pins 1/2 & 3/6
- Power Pins 4/5 & 7/8
- LED Indicator Power
- Ethernet Data Rate 10 /100 / 1000 Mbps
- Ethernet Cable TIA/EIA 568 Cat. 5
- Ethernet Cable Connector RJ-45
- Dimensions 41 x 54 x 23 mm
- Color Black
- Case Material ABS CHIMEI PA-765A UL-94-V-0
- Weight 30 g

Environmental Specifications

- Operating Temperature 0 °C to +50 °C
- Storage Temperature -10 °C to +60 °C
- Operating Humidity 10 to 80% (Non-condensing)
- Storage Humidity 5 to 90% (Non-condensing)

Connection Diagram

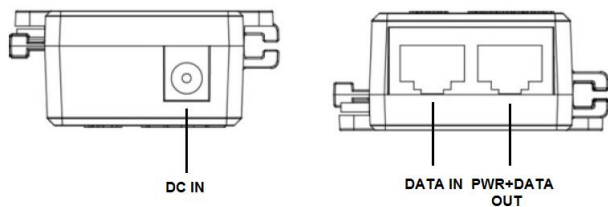

Product Ordering Information

- Order Power Supply Accessories for C2 Series
- 24VDC AC Adaptor Body for C2 Series
 - Adaptor Plug (UK, US, or EU) for C2, C1n Series
 - DC Injector for C2 Series

Contact Us

- Email: sales@altaitechnologies.com

PE-PB-160909

Although Altai has attempted to provide accurate information in these materials, Altai assumes no legal liability for the accuracy and completeness of the information. All specifications are subject to change without notice.