

Specification parameter:

Technical characteristics:

Temperature: -65 ~ +165°C

Characteristic impedance: 75 Ω

Frequency range: DC ~ 4GHz

Working voltage: 500V max

Pressure: 1500V rms

Contact resistance: Between inner conductors ≤ 1.5mΩ

Between outer conductors ≤ 1mΩ


Insulation resistance: ≥ 5000MΩ

Voltage standing in Bobbi: ≤ 1.22

Durability: ≥ 500 times

Material and coating:

Parts	Material	Clad layer
Housing	Brass	Nickel-plated
Pin	Brass	Gold-plated
Bayonet	Brass	Nickel-plated
Insulator	Teflon	

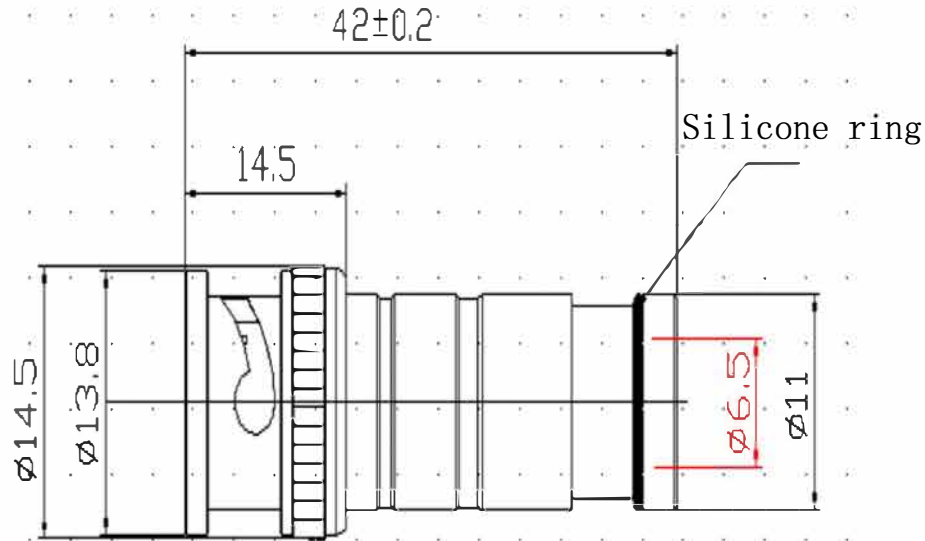

CUSTOMER:		A228	CUST NO:	
X	±0.1	PRODUCT NO:	PART NO:	
X.X	±0.05	TTRG16	TTRG16	
X.XX	±0.005			
X.XXX	±0.0003	DRAWN BY	DRAWING SIZE	1:1
Customer confirmation		CHECKED BY	UNIT	mm
		APPROVED BY	PAGE	1 OF 1
		SORTING NO.		