

Electrical Data


Frequency:	2400-2483 MHz
Gain:	15 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	360°
Vertical Beamwidth:	4.5°
Nominal Impedance:	50 Ohms
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	Ø38*1430mm
(diameter*length)	Ø1.5*56.3in
Weight:	2.8kg/6.2lb
Reflector Material:	Brass
Radome Material:	Fiberglass
Mounting Method:	Mast
Mast Size:	Ø40-Ø60mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	2pcs/Carton
Carton Size:	1480*110*100mm
(length*width*height)	58.3*4.3*3.9in
Packing Weight:	7.1kg/15.6lb

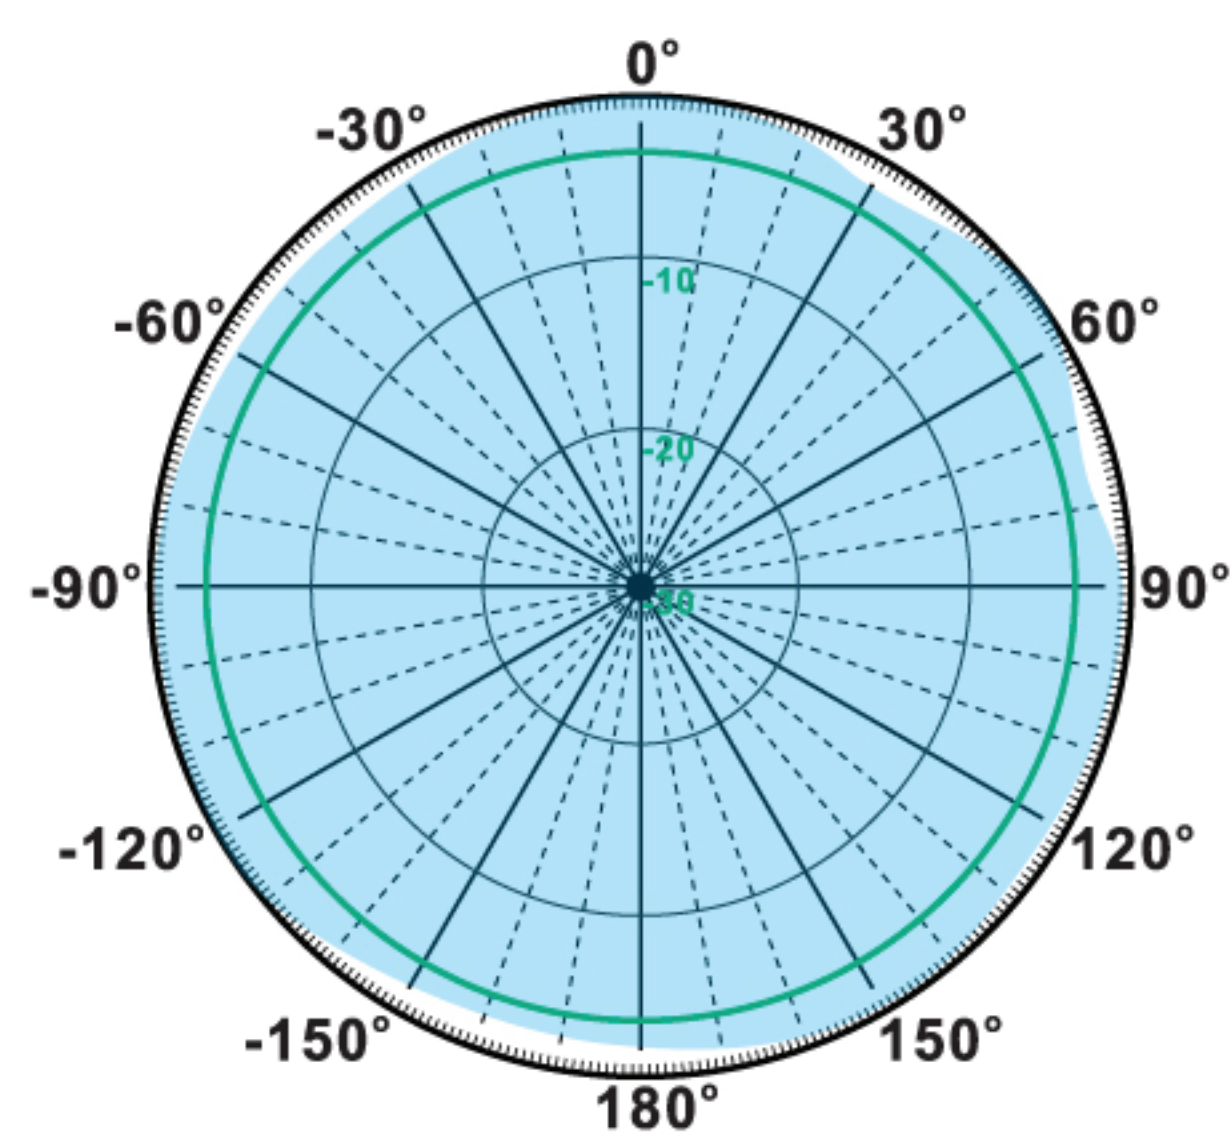

H-Plane

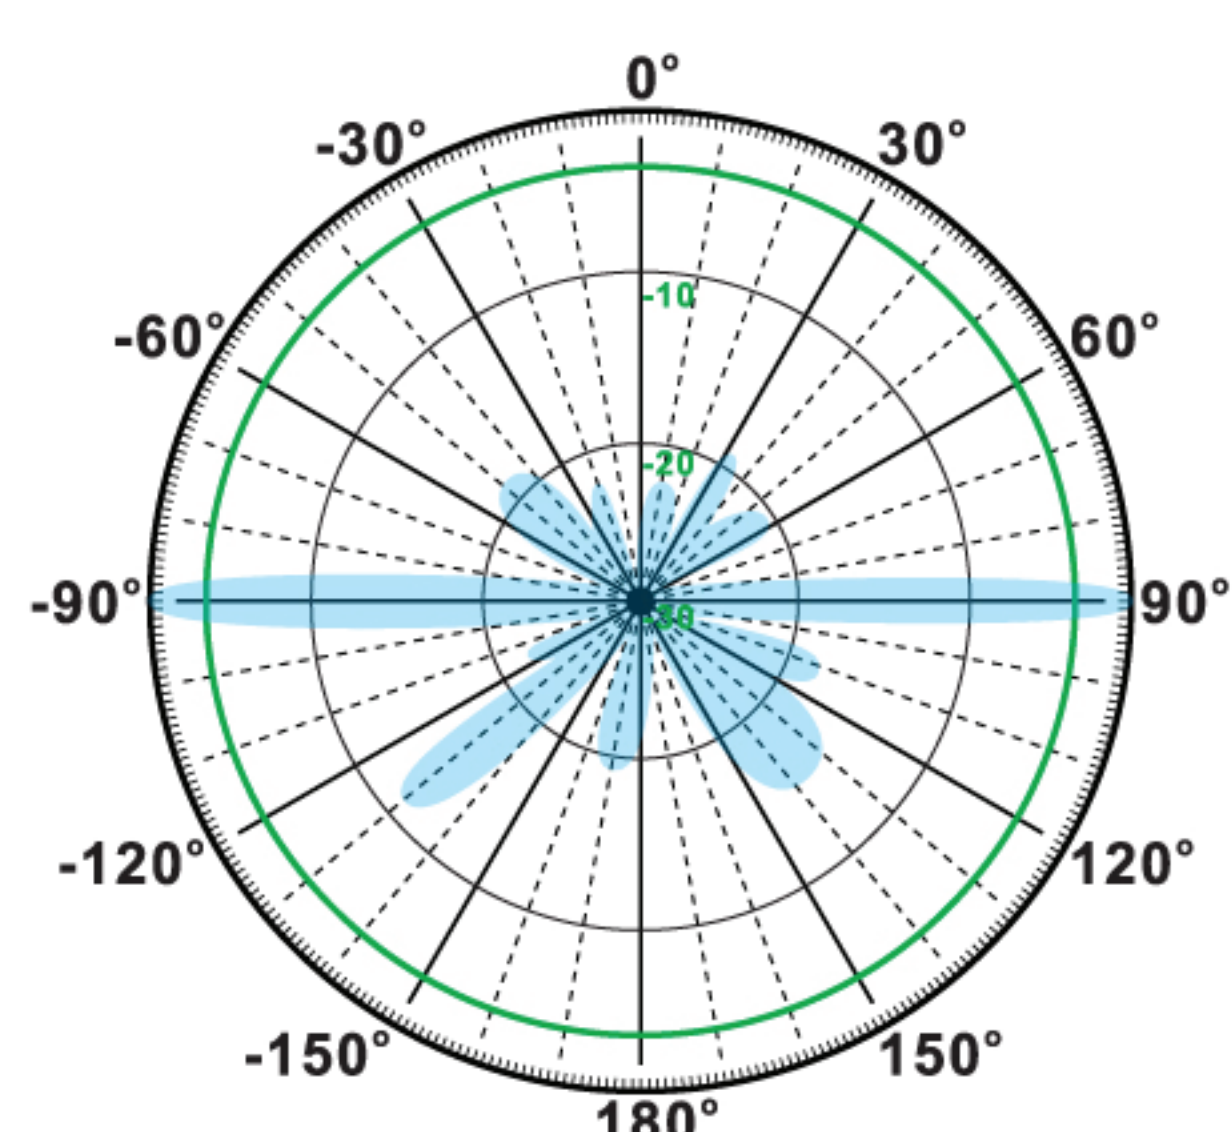

V-Plane

