

10G SFP+ XGS-PON OLT Optical Transceiver(OP49N2-ST)

Hot Pluggable Single SC, +3.3V, Single mode

FEATURES

- Single fiber bi-directional data links TX 9.95Gbps, Burst Mode RX 9.95G/2.488Gbps application
- 0 to 70°C operating case temperature
- 3.3V powersupply
- SFP+ package with SC Receptacle connector
- Hot-pluggable capability
- High power 1577nm EML LD
- High sensitivity 1270nm APD
- Support 20km transmission distance with SMF
- RX_SD indication
- Low EMI and excellent ESD protection
- Digital diagnostic monitor interface
- RoHS compliance

APPLICATIONS

- XGS-PON N2 OLT

STANDARDS

- Complies with SFF-8472
- Complies with ITU G.987.2
- Complies with ITU G.9807.1
- Complies with FCC 47 CFR Part 15, Class B
- Complies with FDA 21 CFR 1040.10 and 1040.11

ABSOLUTE MAXIMUM RATING

Parameter	Symbol	Min.	Max.	Unit	Notes
Storage Ambient Temperature	T _{STG}	-40	85	°C	
Operating Case Temperature	T _A	0	70	°C	
Relative Storage Humidity	RHS	5	95	%	
VCC3 Power Supply Voltage	VCC3	0	3.6	V	

RECOMMENDED OPERATING CONDITION

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Case Temperature	T _c	0		70	°C	
Power Supply Voltage	V _{cc}	3.13	3.3	3.47	V	
Power Supply Consumption	P			2.5	W	
TX Data Rate			9.95		Gbps	
RX Data Rate			9.95 2.488		Gbps Gbps	

10G SFP+ XGS-PON OLT Optical Transceiver(OP49N2-ST)

Hot Pluggable Single SC, +3.3V, Single mode

XGS-PON TRANSMITTER OPTICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Optical Center Wavelength	λ_c	1575		1580	nm	
Optical Spectrum Width (-20dB)	$\Delta\lambda$	-	-	1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Transmitter and Dispersion Penalty	TDP			1	dB	Transmit on 20km SMF
Average Launch Optical Power (EOL)	AOP	+4		+7	dBm	Launched into SMF
Power-OFF Transmitter Optical Power				-39	dBm	Launched into SMF
Extinction Ratio	ER	8.2			dB	PRBS2 ³¹ -1 @9.95Gbps
Optical Waveform Diagram	Compliant with ITU G.9807.1					Figure 1, Mask Margin>5%

XGS-PON TRANSMITTER ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Data Input Differential Swing		180		850	mV	
Input Differential Impedance		90	100	110	Ω	
TX Disable	Disable	2		VCC	V	
	Enable	0		0.8	V	
TX Fault	Fault	2.4		VCC+0.3	V	
	Normal	-0.3		0.4	V	

XGS-PON TRANSMITTER EYE MASK DEFINITIONS AND TEST PROCEDURE

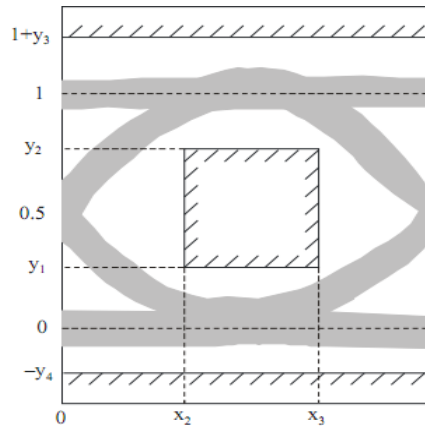


Figure 1 XGPON Transmitter Eye Mask Definitions

X3-X2	Y1	Y2	Y3	Y4	Unit
0.2	0.25	0.75	0.25	0.25	UI

10G SFP+ XGS-PON OLT Optical Transceiver(OP49N2-ST)

Hot Pluggable Single SC, +3.3V, Single mode

XGS-PON RECEIVER OPTICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Wavelength		1260		1280	nm	
Sensitivity	SEN			-28	dBm	PRBS2 ³¹ -1@9.95Gbps BER ≤1×10 ⁻³
Saturation Optical Power	SAT	-7			dBm	
Max Input Power		-3			dBm	
SD Assert Level				-29	dBm	
SD De-Assert Level		-45			dBm	
Hysteresis		0.5		6	dB	

XGPON RECEIVER OPTICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Wavelength		1260		1280	nm	
Sensitivity	SEN			-29.5	dBm	PRBS 2 ²³ -1@2.488Gbps BER ≤1×10 ⁻⁴
Saturation Optical Power	SAT	-9			dBm	
Max Input Power		-3			dBm	
SD Assert Level				-30	dBm	
SD De-Assert Level		-45			dBm	
Hysteresis		0.5		6	dB	

RECOMMENDED XGS/XGPON Receiver Timing Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
RSSI Trigger-Low		0		0.8	V	
RSSI Trigger-High		2.0		Vcc	V	
Data Output Differential Swing		300		850	mV	CML input, DC coupled
Reset-Low		0		0.8	V	
Reset-High		2.0		Vcc	V	
SDVoltage-Low		0		0.4	V	
SDVoltage-High		2.4		Vcc	V	
Reset Width	Tr		25.6		ns	Suggest the first Reset location is partial in preamble of the optical packet.
Data Recovery Time	Ts		50	100	ns	
SD De-Assert Time	TSDD			50	ns	
SD Assert Time	TSDA			50	ns	
Guard time	Tg		50		ns	

10G SFP+ XGS-PON OLT Optical Transceiver(OP49N2-ST)
Hot Pluggable Single SC, +3.3V, Single mode

TIMING PARAMETER DEFINITIONS IN BURST MODE SEQUENCE

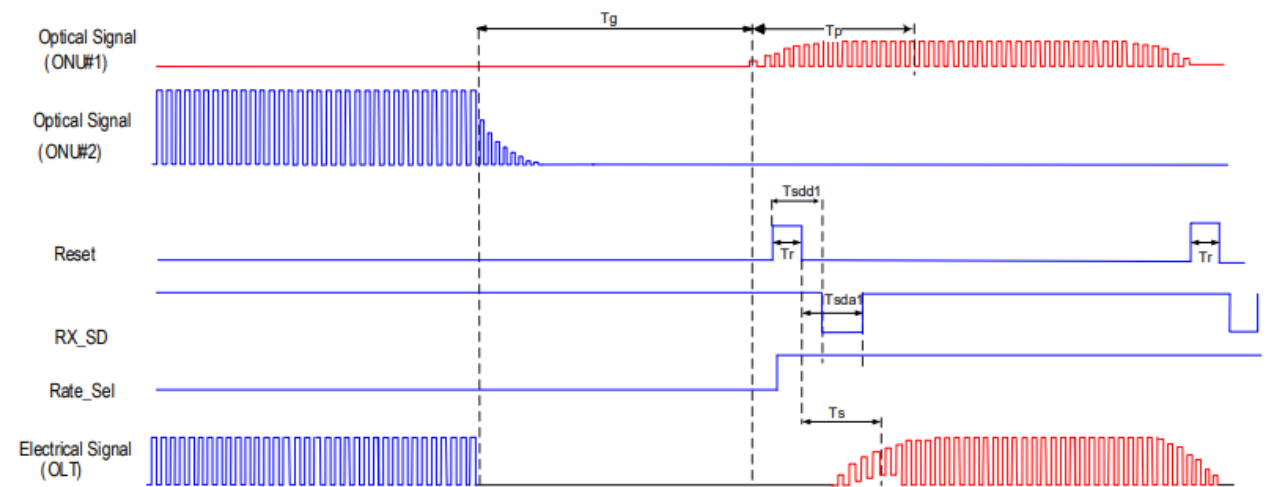


Figure 2 Timing Parameter Definitions in Burst Mode Sequence

RSSI TIMING SEQUENCE						
Parameter	Symbol	Min.	Typ.	Max.	Unit.	Notes
Optical Signal During Time	T_{opt}	1200			ns	
RSSI Trigger width	T_w	500			ns	
RSSI Trigger Delay	T_D	150			ns	
I ² C Access Prohibited Time	T_s			500	μs	

Digital RSSI Sample/Hold Timing Specification

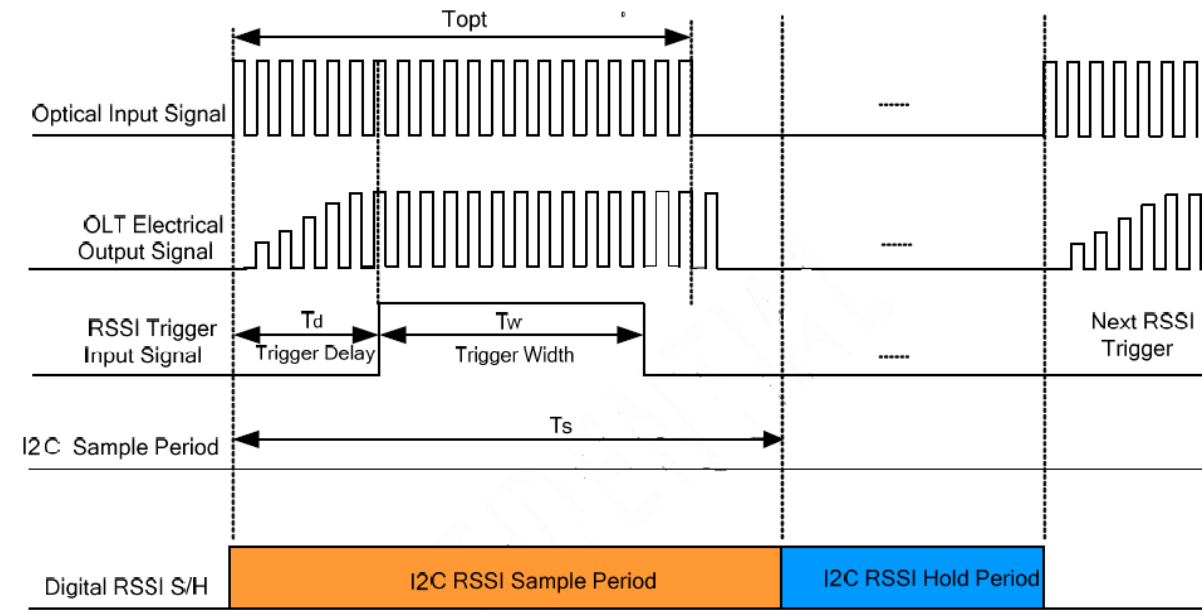


Figure 3 Timing Parameter Definitions in RSSI Trigger

PIN OUT DRAWING

10G SFP+ XGS-PON OLT Optical Transceiver(OP49N2-ST)
Hot Pluggable Single SC, +3.3V, Single mode

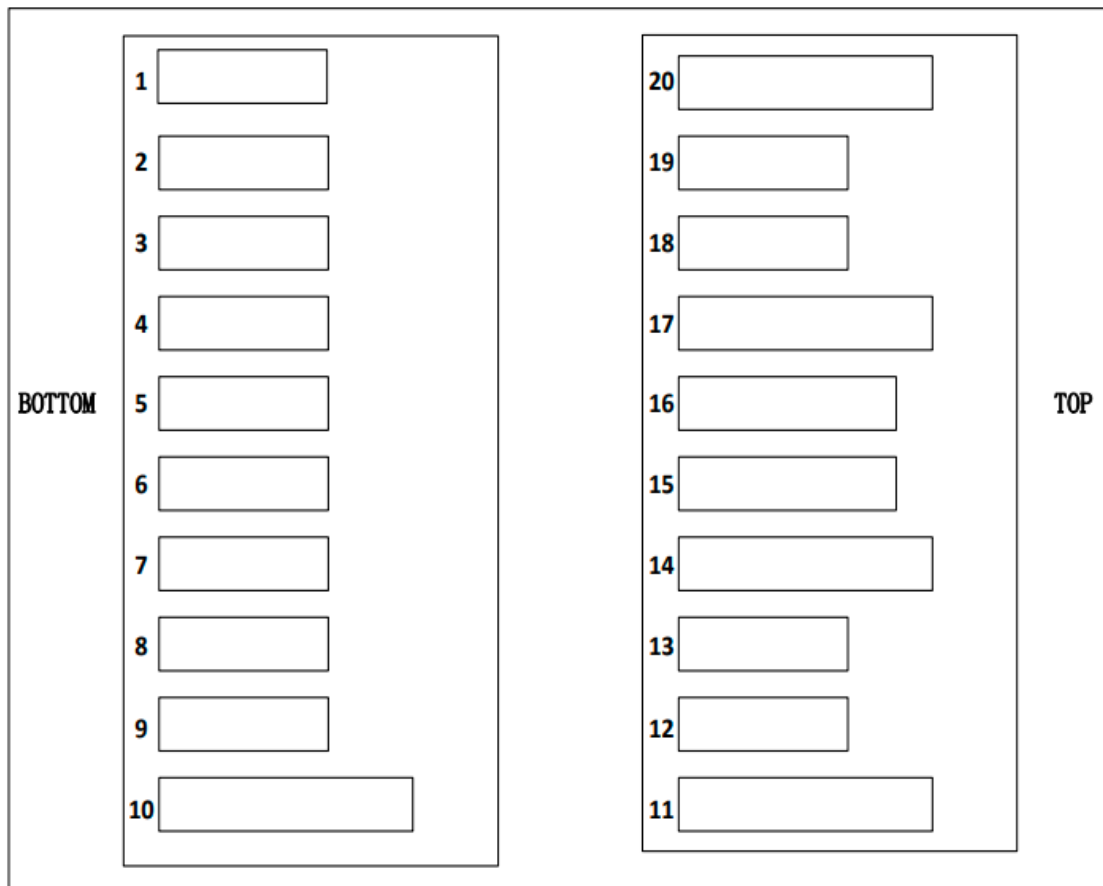


Figure 4 Pin Out Drawing

PIN DESCRIPTION			
PIN	Name	Description	Notes
1	Rate_Select	Rate select	Low:2.488Gbps, High:9.953Gbps
2	TX_Fault	TX fault out	
3	TX_Disable	TX disable in	
4	SDA	I2C Data in/out	
5	SCL	I2C Clock in	
6	MOD_ABS	Module absent	
7	RX_Reset	No connect	
8	RX_SD	Signal detect out	
9	RSSI_Trigger	RSSI trigger in	
10	GND	GND.	
11	GND	GND.	
12	XGS_RD-	XGSPON data out, CML	CML output, DC coupled; squelch function
13	XGS_RD+	XGSPON data out, CML	CML output, DC coupled; squelch function

10G SFP+ XGS-PON OLT Optical Transceiver(OP49N2-ST) Hot Pluggable Single SC, +3.3V, Single mode

14	GND	GND.	
15	VCCR	Module Power	
16	VCCT	Module Power	
17	GND	GND.	
18	XGS_TD+	XGSPON data in, CML	
19	XGS_TD-	XGSPON data in, CML	
20	GND	GND.	

PACKAGE OUTLINE

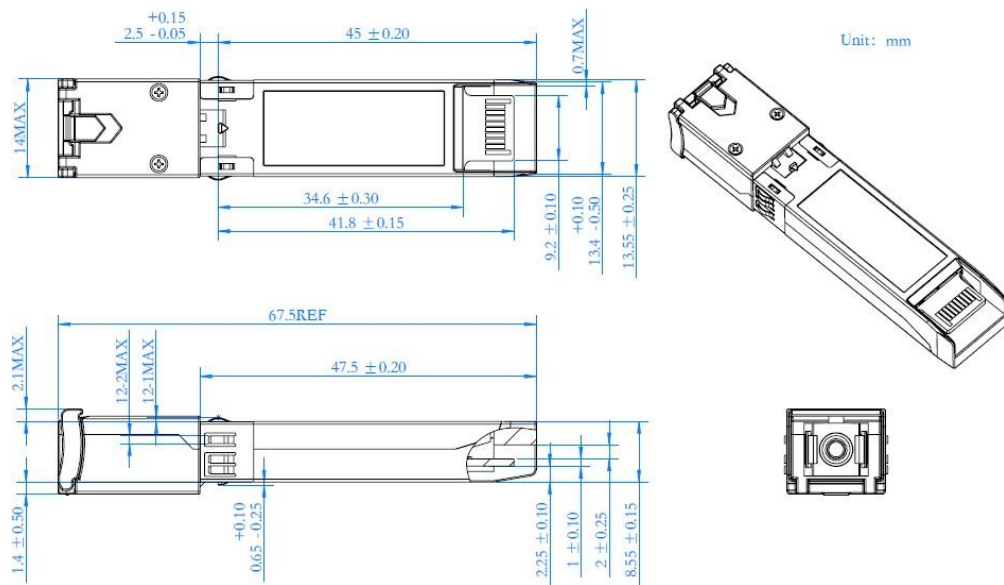


Figure 4 Package Outline

10G SFP+ XGS-PON OLT Optical Transceiver(OP49N2-ST)

Hot Pluggable Single SC, +3.3V, Single mode

EEPROM INFORMATION

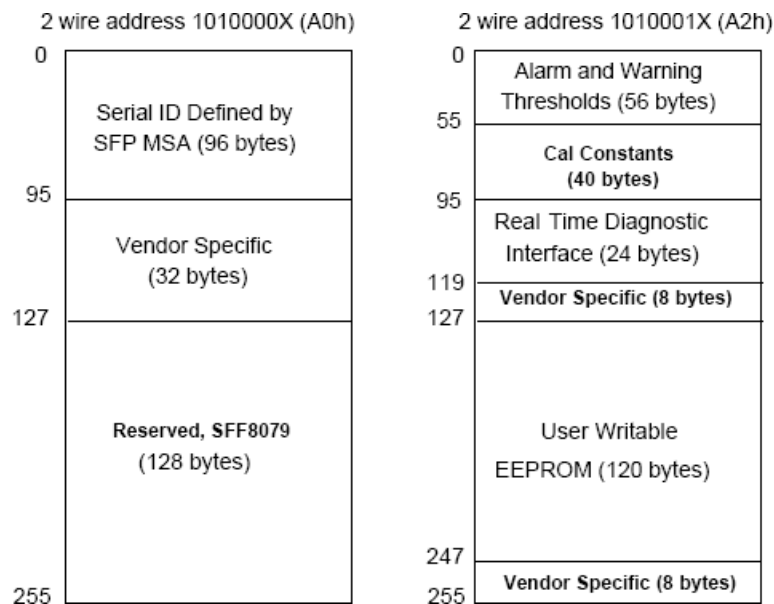


Figure 5 EEPROM Memory Map Specific Data Field Descriptions

DIGITAL DIAGNOSTIC MONITORING INTERFACE

Parameter	Range	Accuracy	Calibration	NOTES
Temperature	0 to 70°C	±3°C	Internal	LSB: 1/256C
Voltage	2.97 to 3.63V	±5%	Internal	LSB: 0.1mV
Bias Current	0 to 262mA	±10%	Internal	LSB: 4uA
TX Power	4 to 7dBm	±3dB	Internal	LSB: 0.2uW
RX Power Monitor	-30 to -7dBm	±3dB	Internal	LSB: 0.1uW