

XMR-DOMEAHD



With IR

Without IR

Main Features

- Specialized structure for vehicle: easy assembly and disassembly; lockable angle and anti-vibration;
- Adapt to volatile environments;
Anti-jamming&low power design: avoid vehicle circuit interface; support high temperature on vehicle roof;
- Audio band-pass filter(optional): reduce vibration noise of vehicle engine and frame


Overview

Streamax AHD mini conch dome camera can provide high resolution image, which can be applied outside and inside of vehicles with anti-vibration features and compact size. User can choose different lenses (2.8mm and 3.6mm optional), with or without audio function, with/without infrared.


Specification

CMOS	1/3 " 1.3M pixel CMOS
Resolution	720P (1.0 MP)
Minimum illumination	0 Lux when IR on
Sync system	Inter-sync
Scanning system	2:1 interlaced
S/N	≥50dB (AGC off)
Lens	3.6mm, 2.8mm optional
Electronic shutter	Auto
White balance mode	Auto
Color to black	Ext
Gamma Correction	0.45
Audio	(Support band-pass filter) Optional
Video output	AHD standard output, 4-pin aviation cable
IR	(6 IR LEDs, IR distance is about 5 meters) Optional
Power	12V DC ± 10%
Consumption(Max.)	120mA/DC 12V ± 5% (IR on); 70mA/DC12V ± 5% (Without IR)
Working temperature	-40°C ~ 70°C
Weight	205g

Dimension (Unit: mm)

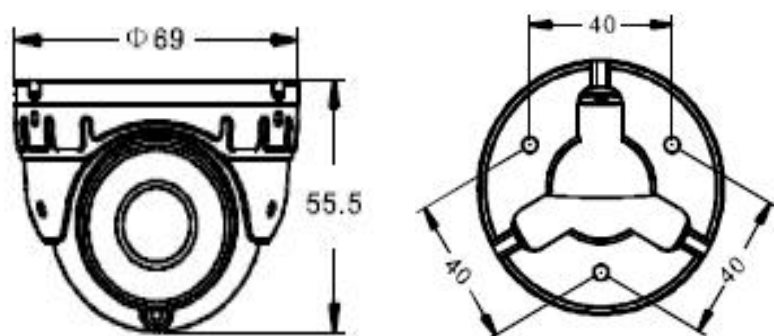

Audio Output

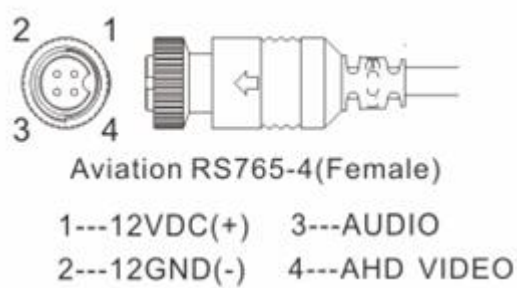

Solution Reference

