



SECURITY CLASSIFICATION: AA

D

E

F

A3

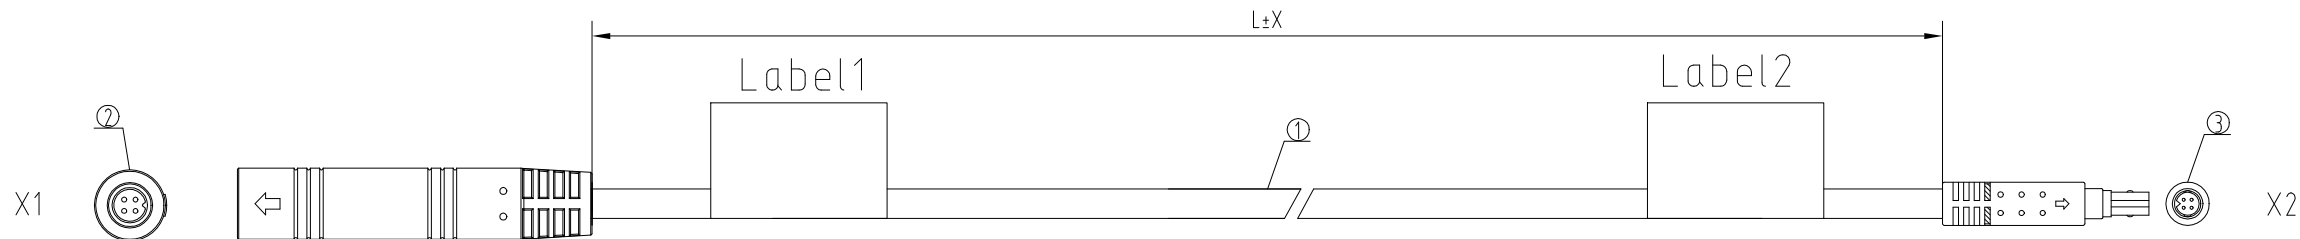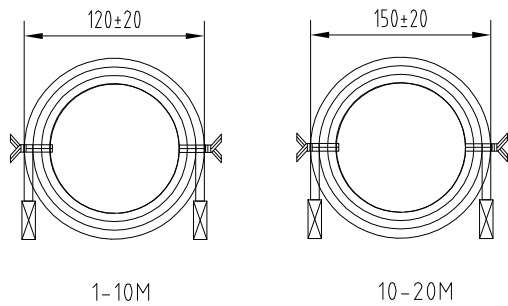

L	X
1500	30
3000	30
5500	60
8000	80
9500	100
11000	110
12500	130
17000	170
20000	200



CONNECTION SCHEME:

X1	Wire COLOR	X2	SIGNAL
1	RED	1	POWER
2	E+S	2	GND
3	YELLOW(Coax)	3	VIDEO
4	WHITE	4	AUDIO

NOTES:


1、Operating Temperature $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$

2、All materials meet RoHS requirement

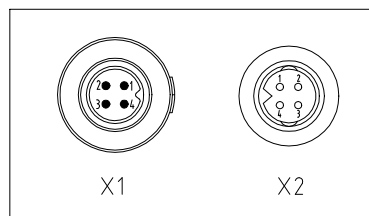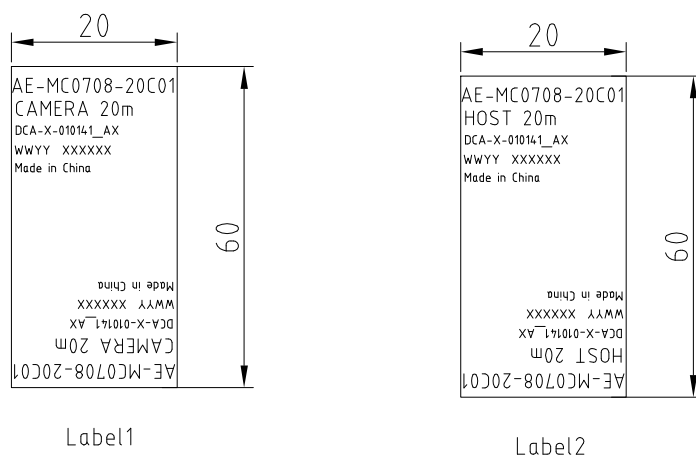

符合RoHS要求 (Conform to the requirements of the RoHS).

Serial Num.	Description	Quantity	TYPE
1	UL20789,[26#×1C+S,50±5 Ohms)+24#×2C+AE(11/0.16TC)		
2	BM4 Male,4Pin	1pcs	
3	BM4 Female,4Pin	1pcs	

<1>												
NO.	REV	DESCRIPTION 修改记录								AREA	BY	DATE
DESIGN		PART NAME:	AE-MC0708-LC01		PART NO:			HIKVISION				
APPROVED		DWG NO:			REV:		STATE:	HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.				
STANDARD		MATERIAL:			WEIGHT:		GRADE:		FIRST ANGLE	SCALE	SIZE:	A3
MCODE		FINISH:			FIRST USED_ON					1:1	SHEET 1 OF 1	