



僑威科技股份有限公司  
 寧波冠碩電子有限公司  
 NINGBO ISO ELECTRONIC CO.,LTD.

# SPECIFICATION FOR APPROVAL

## 產品規格承認書

CUSTOMER APPROVAL(客戶簽章)
DATE(日期):

CUSTOMER(客戶): 海康  
 PART NO(料號): E99-KPL065S-L025(101700994) REV: F  
 DESCRIPTION(類別): 電源適配器

\*PLEASE SIGN AND RETURN ONE COPY.  
 \*ALL PRODUCTION UNITS WILL BE BUILT ACCORDING TO THIS SPECIFICATIONS.  
 \*請客戶簽名並返回一份復本給我司，後續生產交貨依此份承認書為準

PREPARED(制定)	CHECKED(確認)	APPROVED(核准)
管典鋒	易检华	郑斌
DATE : 2019.11.26	DATE : 2019.11.26	DATE : 2019.11.26

MODEL NO(產品型號): KPL-065S-II 48.0V/1.35A 65W 1185#18  
5.5\*1.7\*10\*1200mm 180度

WEB SITE(網址):[Http://www.cwt.nb.com.cn](http://www.cwt.nb.com.cn)  
[Http://www.cwt.com.tw](http://www.cwt.com.tw)

E-mail(電子郵件):[SALES@cwt.nb.com.cn](mailto:SALES@cwt.nb.com.cn)

ADDRESS:10,Chuang-ye Rd,The West of Ningbo Free Trade Zone,Ningbo, Zhejiang,P.R. China.

地址:中國,浙江省,寧波市,寧波保稅區西區,創業大道10號

TEL(電話):0574-86879335

FAX(傳真):0574-86879078





## Table of Contents

<b>1</b>	<b>SCOPE .....</b>	<b>5</b>
<b>2</b>	<b>ELECTRICAL SPECIFICATION .....</b>	<b>5</b>
2.1	INPUT REQUIREMENT .....	5
2.1.1	Input voltage range .....	5
2.1.2	Input frequency range .....	5
2.1.3	AC inrush current .....	5
2.1.4	Input current .....	5
2.1.5	Leakage current .....	6
2.1.6	Low power consumption .....	6
2.2	INPUT PROTECTION .....	6
2.2.1	Input current protection .....	6
2.3	OUTPUT REQUIREMENT .....	6
2.3.1	Output power .....	6
2.3.2	Output voltage and current .....	6
2.3.3	Ripple and noise .....	7
2.3.4	Over voltage protection .....	7
2.3.5	Over current protection .....	7
2.3.6	Overshoot .....	7
2.3.7	Short circuit Protection .....	7
2.3.8	Audible noise .....	8
2.4	PERFORMANCE REQUIREMENT .....	8
2.4.1	Efficiency .....	8
2.4.2	Turn on delay time .....	8
2.4.3	Hold-up time .....	8
2.4.4	Dynamic load .....	8
<b>3</b>	<b>ENVIRONMENTAL SPECIFICATION .....</b>	<b>8</b>
3.1	TEMPERATURE .....	8
3.2	HUMIDITY .....	9
3.3	VIBRATION AND SHOCK .....	9
3.4	ALTITUDE .....	9
3.5	CALCULATED MEAN TIME BETWEEN FAILURES (MTBF) .....	9

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 3 of 12	



3.6 BURN-IN ..... 9

**4 RELATED SPECIFICATION.....10**

4.1.1 SAFETY STANDARD ..... 10

4.1.2 EMI ..... 10

4.1.3 Dielectric strength—(Hi-pot)..... 10

4.1.4 INSULATION RESISTANCE..... 11

4.1.5 LEAKAGE CURRENT ..... 11

4.1.6 Surge ..... 11

4.1.7 Electrostatic discharge ESD ..... 11

4.1.8 RF Immunity..... 11

4.1.9 Environment standards ..... 11

4.1.10 Electrical Fast Transients (EFT) ..... 11

**5 MECHANICAL .....12**

5.1 INPUT CONNECTOR AND OUTPUT CABLE ..... 12

5.1.1 Input connector ..... 12

5.1.2 Output cable..... 12

5.2 AC ADAPTER EXTERNAL DIMENSION ..... 12

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 4 of 12	



## 1 SCOPE

This document describes basic electrical characteristics and mechanical characteristic of **65 W** power adapters.

## 2 ELECTRICAL SPECIFICATION

### 2.1 INPUT REQUIREMENT

#### 2.1.1 INPUT VOLTAGE RANGE

Industrial power supply shall operate within input specification from 90Vac to 264Vac or provide automatic switching between high line and low line input ranges. The table below shows common input voltage range.

Input Range	Minimum	Nominal	Maximum	Unit
	90 V	100V- 240V	264V	Vac Rms

Table 1 - Input Voltage Range

#### 2.1.2 INPUT FREQUENCY RANGE

The industrial power supply shall operate within specification from 47 to 63 Hz.

#### 2.1.3 AC INRUSH CURRENT

Peak inrush current should not exceed 100 A at 240Vac, 50Hz, 25 degrees C, cold start. It should not interrupt line fuse or cause damage to the industrial power supply either at cold or warm start.

Peak inrush current should not exceed 60 A at 100Vac, 60Hz, 25 degrees C, cold start. It should not interrupt line fuse or cause damage to the industrial power supply either at cold or warm start.

The inrush current must be limited to the extent that no damage is done to the supply under any specified line, load, and temperature conditions. The inrush current shall not cause any external protection devices (i.e. fuses) to trip.

#### 2.1.4 INPUT CURRENT

Maximum steady state input current shall not exceed 1.7 A for any line voltage specified in 2.1.1.

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 5 of 12	



### 2.1.5 LEAKAGE CURRENT

0.75mA maximum at 240Vac 50Hz

### 2.1.6 LOW POWER CONSUMPTION

Vin	Load	Power consumption
240Vac/50Hz 100Vac/60Hz	0A	≤ 0.15 W

## 2.2 INPUT PROTECTION

### 2.2.1 INPUT CURRENT PROTECTION

A fuse with rating of 3.15 A / 250 V (Time Lag type) shall be installed on the input line side near the input connector and no any electrical components before.

## 2.3 OUTPUT REQUIREMENT

### 2.3.1 OUTPUT POWER

The total output power, under steady state conditions, shall not exceed 65 W.

### 2.3.2 OUTPUT VOLTAGE AND CURRENT

Under any combination of line and load variation and environmental conditions, all outputs shall remain within tolerance as defined in Table 2. Output voltage(s) shall be measured at the load side of output connector.

Output Voltage	Voltage Range		Current Range		
	Lower Limit	Upper Limit	Minimum Load	Full rated load	PK Load
+48.0V	46.08V	49.92V	0.0A	1.35A	--

Table 2 - Output Voltage and Current

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 6 of 12	



### 2.3.3 RIPPLE AND NOISE

Measurements shall be made with an oscilloscope with minimum of 20MHz bandwidth and 1:1 scope Probe, Output shall be bypassed at the connector with a 0.1 $\mu$ F ceramic disk capacitor and a 47 $\mu$ F electrolytic capacitor for general testing purpose.

Output Voltage	Maximum Ripple & Noise (Vp-p)
+48.0V	300mV

Table 3 – Ripple and Noise

### 2.3.4 OVER VOLTAGE PROTECTION

The power supply shall provide with over voltage protection such that under any single component failure.

The power supply provides output over voltage protected in latch off by zener diode, and no damage to customer device.

### 2.3.5 OVER CURRENT PROTECTION

The power supply shall be protected when operating any output in overload condition. The power supply shall be shut down and no any damage when the over current condition occurs on the output, and It will be auto-recovered when the failure is removed.

Output Voltage	Over current protection		Test condition
	Lower Limit	Upper Limit	
+48.0V	1.55A	2.70A	Input voltage:100Vac 60Hz or 240Vac 50Hz.

Table 4 –Over current protection

### 2.3.6 OVERSHOOT

During turn on or turn off, the output overshoot shall not exceed nominal output voltage by more than 5%, and output shall not change its polarity with respect to its return line.

### 2.3.7 SHORT CIRCUIT POTECTION

Power supply shall have self-limiting protection to protect against short circuit or overload conditions. No damage to the power supply shall result from a continuous or intermittent short circuit condition. It will be auto-recovered when the failure is removed.

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 7 of 12	



### 2.3.8 AUDIBLE NOISE

There is no audible noise canned been heard when it work with rated spec.

## 2.4 PERFORMANCE REQUIREMENT

### 2.4.1 EFFICIENCY

Active average mode Efficiency (watt out / watt in) shall be a minimum of 89.00 % at 230vac/50Hz.

Active average mode Efficiency (watt out / watt in) shall be a minimum of 88.00 % at 115vac/60Hz.

Complies to EPA DOE standard specification and EU CEC standard specification (Level VI).

calculate the model is single average active mode efficiency for each test voltage by testing at 100%,75%,50%,and 25% of rated current output and then computing the simple arithmetic average of these four values respectively at 115V/60HZ and 230V/50HZ test result for reference.

Efficiency (watt out / watt in) shall be a minimum of 79.00 % at 10% full load.

**Note: when testing efficiency, adapter needs to electrify to perform after full load 60 minutes**

**Input voltage 115Vac 60Hz or 230Vac 50Hz**

### 2.4.2 TURN ON DELAY TIME

Output shall reach steady state within 5 seconds of turn on at 100Vac or greater.

Output shall reach steady state within 2 seconds of turn on at 240Vac or greater.

### 2.4.3 HOLD-UP TIME

Hold-up time shall be a minimum of 8 mS at 100Vac / 60Hz input.

### 2.4.4 DYNAMIC LOAD

Power supply output voltage tolerance shall be complied with  $\pm 5\%$ .

Step load change: from 50% to100% Load on the output.

Dwell Time: 100Hz & 1 KHz 50% duty.

Slew rate: 0.5A/uses

## 3 ENVIRONMENTAL SPECIFICATION

### 3.1 TEMPERATURE

Operation within specification: -10 to 40 degrees C.

Storage: -20 to 85 degrees C

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 8 of 12	



### 3.2 HUMIDITY

Operation: 10% to 90% relative humidity, non-condensation.

Storage: 5% to 95% relative humidity, including condensation.

### 3.3 VIBRATION AND SHOCK

The power supply shall be designed to withstand normal transportation vibration per MIL-STD-810F, method 514 and procedures X, as it is mounted in the chassis assembly and packed for shipping.

### 3.4 ALTITUDE

The power supply shall operate properly at any altitude between 0 ~ 16,404 feet (5000 meter) above sea level, and withstand storage at 50,000 feet.

### 3.5 CALCULATED MEAN TIME BETWEEN FAILURES (MTBF)

The MTBF for the power adapter shall equal or exceed 100,000 hours when operated at full rated load in an ambient temperature of 25 degree C.

### 3.6 BURN-IN

Burn-in test:

Test condition: 110Vac / 220Vac 50Hz, with 100% maximum load at 45 ±5°C ambient temperature.

Test method: burn-in 110 minutes; and 30 seconds "ON", 30 seconds "OFF" within 5 minutes, then 5 minutes "ON"

Test criteria: during this conditioning the power supply output normal and no damage or hazardous condition will occur.

ORT and life test:

Input condition: 110Vac / 220Vac 50Hz, "ON/OFF" 10 times within 5 minutes, 45 minutes "ON" 45 minutes "OFF",

Test condition: cycle by cycle test 168 hours with 100% maximum load at 45 ±5°C ambient temperature.

Test criteria: during this conditioning the power supply output normal and no damage or hazardous condition will occur.

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 9 of 12	



#### 4 RELATED SPECIFICATION

##### 4.1.1 SAFETY STANDARD

Agency	Certification required	Countries
UL/ cUL	UL60950-1; CAN/CSA C22.2 No. 60950-1-07+A1:2011+A2:2014	US/ Canada
CB	IEC 60950-1:2005 (Second Edition) +Am 1:2009+Am 2:2013	IEC
CCC	GB 4943.1-2011; GB9254-2008; GB17625.1-2012	China
GS	EN 60950-1:2006+A11+A1+A12+A2;	Germany
PSE	J60950-1(H27);J55022(H22);J3000(H25)	Japan
BIS	IS 13252(PART 1):2010/IEC 60950-1:2015	India
FCC	ICES-003 : 2016;FCC Part15	US
CE	EN55032 : 2015;EN55024 : 2010+A1 : 2015;	Europe

(Currently All certification marks meet safety requirement only)

##### 4.1.2 EMI

VCCI Class-B

FCC 15(Class-B, 115Vac operation)

CISPR 22 Class-B limits

EN55022 (1998+A1:2000+A2:2003 Class-B limits)

47 CFR Part 15, Subpart B, Class B limits

GB 9254 ITE Emissions Latest Edition

##### 4.1.3 DIELECTRIC STRENGTH—(HI-POT)

Primary to secondary: 3000VAC.

Test time: 60 second

Cut-off current: 5mA max

Arcing current: 10mA max

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 10 of 12	



#### 4.1.4 INSULATION RESISTANCE

Insulation resistance shall be more than **100M** ohm between primary and secondary under normal atmospheric conditions

Insulation resistance shall be more than **10M** ohm between primary and secondary in hot and humid conditions

#### 4.1.5 LEAKAGE CURRENT

**0.75 mA** maximum at **264Vac 50Hz**

#### 4.1.6 SURGE

It is referring to EN61000-4-5 IEC61000-4-5:2001 Level 4.

Differential mode surge immunity: 2KV

Common-mode Surge Immunity: 4KV

\* **Determination level: Criteria A (Product testing and testing before and after any change in function is not).**

#### 4.1.7 ELECTROSTATIC DISCHARGE ESD

It is referring to EN61000-4-2, IEC61000-4-2:2001, IEC801-2 Level 3.

Contact electrostatic discharge: + - 6KV.

Air electrostatic discharge: + - 8KV.

\* **Determination level: Criteria A (Product testing and testing before and after any change in function is not).**

#### 4.1.8 RF IMMUNITY

It is referring to IEC61000-4-3 Class A 3V/m

#### 4.1.9 ENVIRONMENT STANDARDS

RoHS Regulation

The RoHS compliance symbol will be included on the data plate.

#### 4.1.10 ELECTRICAL FAST TRANSIENTS (EFT)

It is referring to IEC61000-4-4 Class B Test Voltage: 2KV

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 1 1 of 12	



## 5 MECHANICAL

### 5.1 INPUT CONNECTOR AND OUTPUT CABLE

#### 5.1.1 INPUT CONNECTOR

AC Input connector shall be IEC320 C14 or C6 power connector.


#### 5.1.2 OUTPUT CABLE

Please read the reference to FIG.

### 5.2 AC ADAPTER EXTERNAL DIMENSION

ISSUE DATE: 2018/09/12	Revision No.: C	
Specification No:	Page: 12 of 12	

版本	修訂內容	修訂者	日期
0.1	新制定	彭效亮	20140416

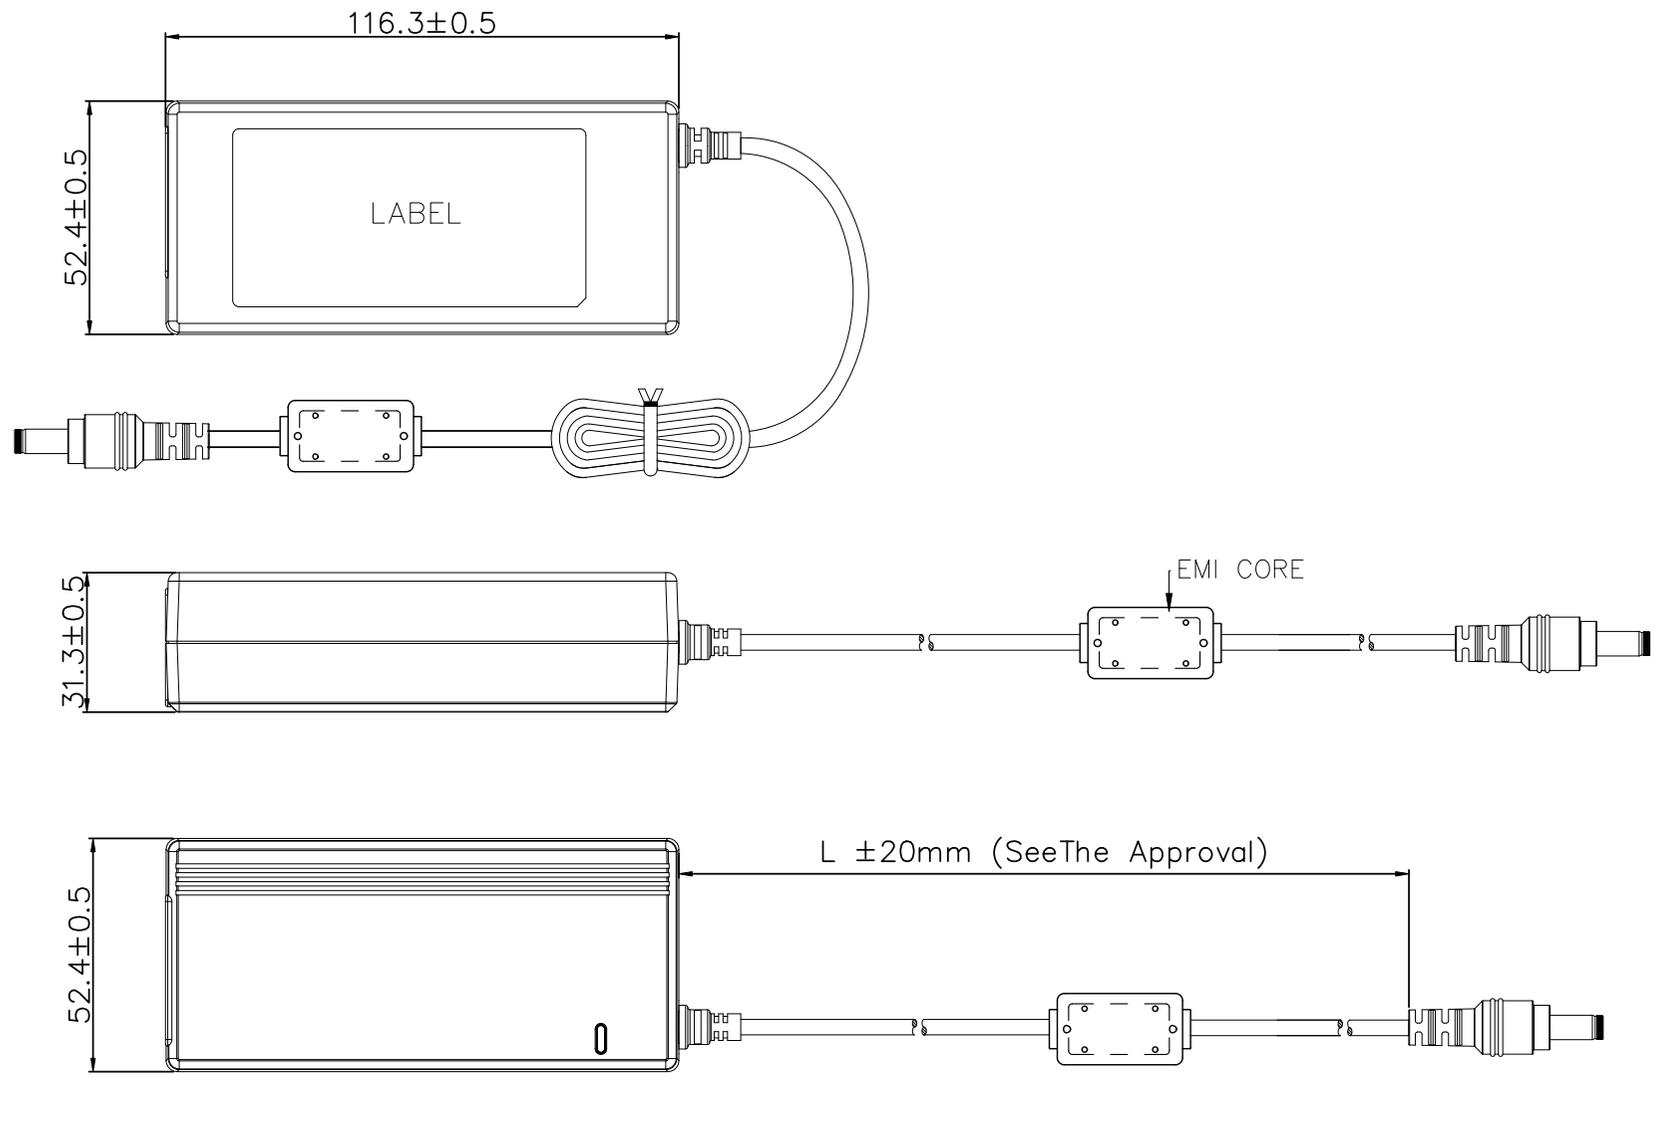

環保材料標準：

No	有害物質名稱	含量標準	SHEET METAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)				單重: g	0.1	DESCRIPTION		
1	鎘 (Cd)	<75ppm	DIMENSION	PIERCING	BENDING	ANGULAR	REV.	UNIT: mm			
2	鉛 (Pb)	<800ppm	$X < 8$	$\pm 0.1$	$\pm 0.15$	$\pm 0.3^*$	MATERIAL				
3	汞 (Hg)	<800ppm	$8 \leq X < 25$	$\pm 0.1$	$\pm 0.2$	$\pm 0.5^*$	DRAWING NO.:				
4	六價鉻 (Cr)	<800ppm	$25 \leq X < 100$	$\pm 0.15$	$\pm 0.25$	$\pm 0.5^*$	APPROVED	CHECKED	DESIGNED	SCALE: $\frac{1}{1}$	
5	多氯聯苯 (PBB)	<800ppm	$100 \leq X < 300$	$\pm 0.2$	$\pm 0.3$	$\pm 1^*$	DATE: 20140416	DATE: 20140416	DATE: 20140416	SHEET 1 OF 1	
6	多溴二苯聯 (PBDE)	<800ppm	$300 \leq X < 800$	$\pm 0.3$	$\pm 0.5$	$\pm 1.5^*$	DATE: 20140416	DATE: 20140416	DATE: 20140416	M/A4L	
7	錳, 鉛, 汞, 六價鉻 (包裝材料)	總含量 <100ppm	THIRD ANGLE PROJECTION								



APPROVED: 郑斌  
 CHECKED: 施继成  
 DESIGNED: 彭效亮



1

2

3

4

5


6

A

B

C

D

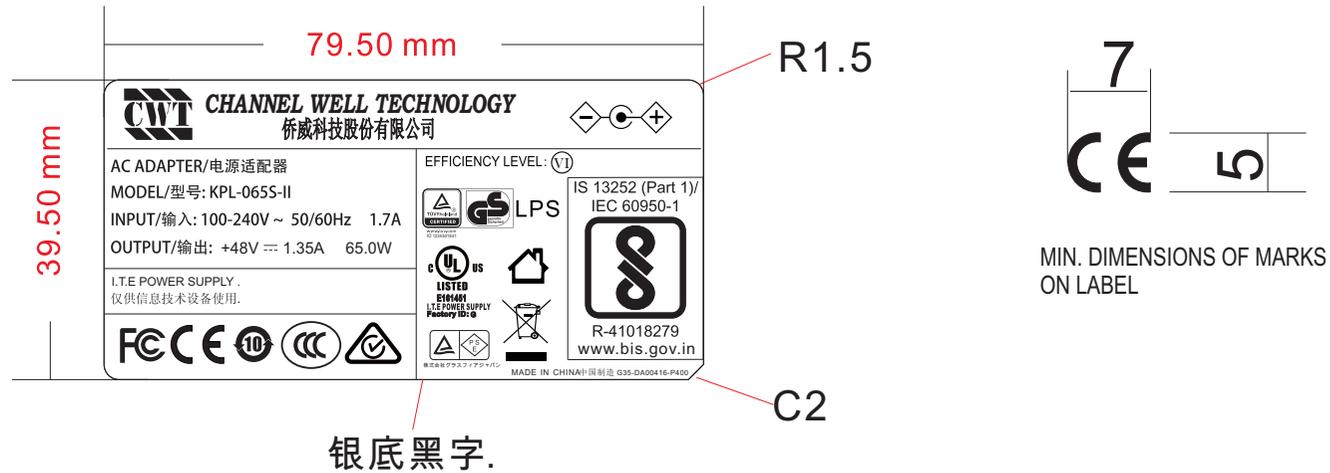

NOTE:

1. Material: Self-adhesive matt silver PET paper(消銀龍) 100#.  
(meet UL regulations)
2. Surface treatment : +OPP
3. Color: Silver characters on black.
4. Thickness: 0.12~0.15mm.
5. High temperature test: the need to temperature 80° 2 hours, not warped or wrinkled skin.
6. Safety signs Follow the safety standard to produce.

備註:

材質: 100#消銀龍+OPP(UL安規)  
 顏色: 銀底黑字  
 溫度測試: 需要耐溫80度, 2小時, 不翹皮等  
 安規標誌依據安規符號標準製作  
 尺寸要求為79.5\*39.5mm 公差:(+0/-0.2)

Material standard of environmental protection:

No	Hazardous Substances	Content Standards	SHEET METAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)			
			DIMENSION	PIERCING	BENDING	ANGULAR
1	鎘 (Cd)	< 75 ppm				
2	鉛 (Pb)	< 800 ppm				
3	汞 (Hg)	< 800 ppm	X < 8	± 0.1	± 0.15	± 0.3°
4	六價鉻 (Cr <sup>6+</sup> )	< 800 ppm	8 ≤ X < 20	± 0.1	± 0.2	± 0.5°
5	多溴聯苯 (PBB)	< 800 ppm	25 ≤ X < 100	± 0.15	± 0.25	± 0.5°
6	多溴二苯醚 (PBDE)	< 800 ppm	100 ≤ X < 300	± 0.2	± 0.3	± 1°
7	Packaging materials	總含量 < 100 ppm	300 ≤ X < 800	± 0.3	± 0.5	± 1.5°

0.4	20191126管典鋒 增加BIS标志, FCC文字变更为符号, 其它标志位置调整		
0.3	20190625管典鋒 增加RCM标志, FCC采用文字描述		
0.2	190411蔡春燕 更正型號為"型号",更新3C/TUV ID及更新DC PLUG為梯形		
0.1			
REV.	DESCRIPTION		
	UNIT: mm		
	MODEL NO.: KPL-065S-II		
	MATERIAL		
	PART NO.: G35-DA00416-P400		
	DRAWING NO.:		
APPROVED	SAFETY	CHECKED	DESIGNED
xl.lu	Jesse	xq.su	liniro
DATE: July. 24. 27	DATE: July. 24. 27	DATE: July. 24. 27	DATE: July. 14. 27
THIRD ANGLE PROJECTION			
1 OF 1			M/A4 L

1	2	3	4	5	6
版本	修訂內容	修訂者	日期		
0.1	新制定	潘小琪	20170830		
0.2	應海康要求101700994變更產品型號，修改大貼紙條碼同步升級	潘小琪	20180116		

A



B

此代碼信息不含在條碼信息里，  
條碼信息只含“S/N”的信息

嘉葵主件料號	海康物料代碼	電源型號代碼(說明1)	產品版本(說明2)
E99-KPL065S-L025	101700994	QH	A2

C

注：  
 JK:代表嘉葵(固定不變)  
 QH:代表電源型號(說明1,固定不變)  
 YY(前兩個Y):代表生產年份,用字母A~J代表數字0~9,如07年用AH表示  
 Y(后一個Y):代表生產月份,用字母A~L代表數字1~12,如5月用"E"表示,10月用"J"表示  
 ZZZZ:代表流水號(00001-99999,10萬以上的從0A000-0A999,0B000-0B999,.....0Z000-0Z9999,其中字母I和O不要)  
 RR:代表產品版本(說明2),(版本編碼原則:從A1~AN,B1~BN.....Z1~ZN)

D

- 工作要點:
1. 材質:網格底50#啞白PET
  2. 印刷必須清晰可見,不能有斷線,模糊不清等不良
  3. 貼紙的印刷油墨,紙張材質及背膠覆膜都必須符合RoHS要求
  4. 背膠必須耐溫80 C不會翹起
  5. 編碼原則:128碼
  6. 尺寸:58\*10mm(公差:+/-0.3)

環保材料標準

No	有害物質名稱	含量標準	SHEET METAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)				單重: g	0.2	DESCRIPTION		
1	鎘(Cd)	<75ppm						REV.			
2	鉛(Pb)	<800ppm	DIMENSION	PIERCING	BENDING	ANGULAR			UNIT: mm	MODEL NO.: 海康專用條碼	
3	汞(Hg)	<800ppm	X<8	±0.1	±0.15	±0.3°			MATERIAL	PART NO.: G35-DF00206-P200	
4	六價鉻(Cr) <sup>6+</sup>	<800ppm	8<X<25	±0.1	±0.2	±0.5°				DRAWING NO.:	
5	多溴聯苯(PBB)	<800ppm	25<X<100	±0.15	±0.25	±0.5°	APPROVED	CHECKED	DESIGNED		
6	多溴二苯醚(PBDE)	<800ppm	100<X<300	±0.2	±0.3	±1°	鄭斌	王艳丽	潘小琪	SCALE:	SHEET
7	氣鉛,六價鉻, (包裝材料)	總含量<100ppm	300<X<800	±0.3	±0.5	±1.5°	DATE: 20170823	DATE: 20170823	DATE: 20170823	THIRD ANGLE PROJECTION	1 OF 1



1

2


3

4


5

6



STEP1:將成品及線材整理如下圖



STEP2:將成品如圖般放入PE袋內

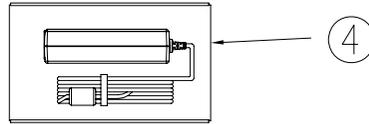

STEP3:將成品如圖般放入格板內

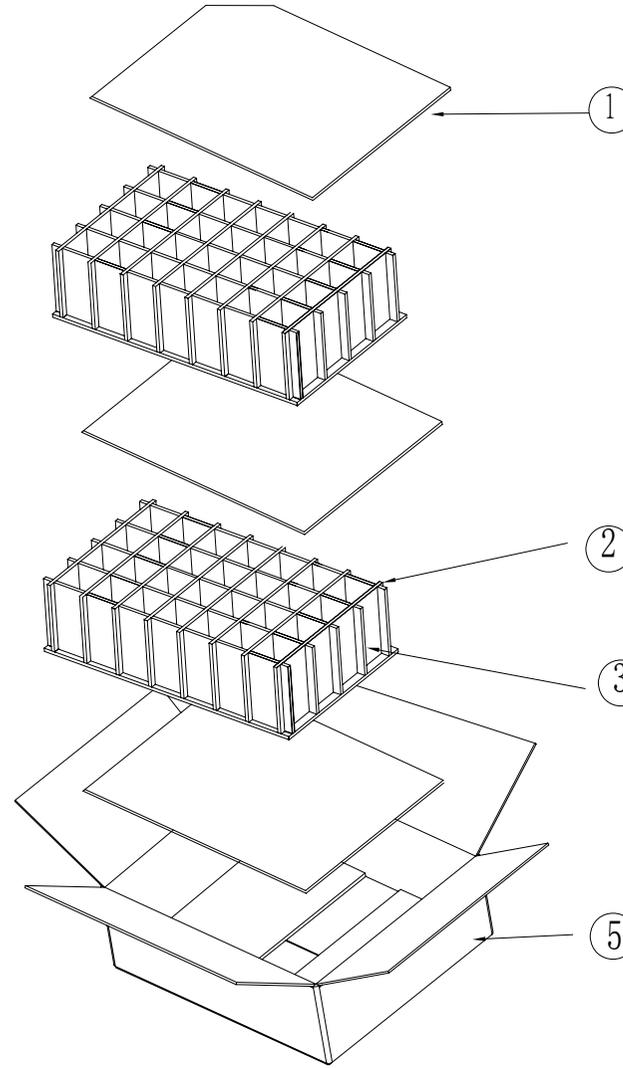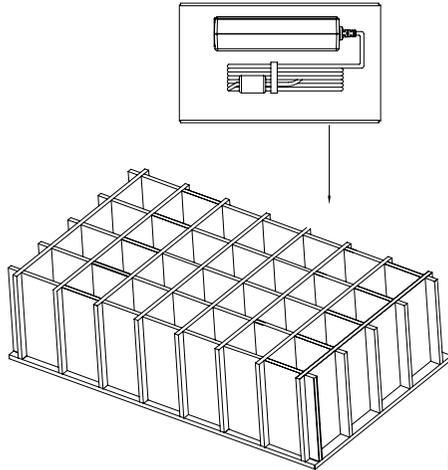

1.組件:

- 1.1.:平卡:538\*353mm  
用量:3PCS
- 1.2.:五刀卡: 353\*140mm  
用量:16PCS
- 1.3.: 八刀卡:538\*140mm  
用量:10PCS
- 1.4.:PE袋:220\*180mm  
用量:56PCS
- 1.5.:外箱: 550\*365\*326mm  
用量:1PCS
- QTY.: 56 PCS

環保材料標準:

No	有害物質名稱	含量標準	SHEET METAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)				0.1	DESCRIPTION			
			DIMENSION	PIERCING	BENDING	ANGULAR	REV.				
1	鎘 (Cd)	<75ppm					<b>CWT</b> 僑威科技	UNIT: mm	MODEL NO.: KPL		
2	鉛 (Pb)	<800ppm						MATERIAL	PART NO.:		
3	汞 (Hg)	<800ppm	X < 8	±0.1	±0.15	±0.3°		*****	DRAWING NO.:		
4	六價鉻 (Cr)	<800ppm	8 ≤ X < 25	±0.1	±0.2	±0.5°		APPROVED	CHECKED	DESIGNED	550-365-326-02
5	多溴聯苯 (PBB)	<800ppm	25 ≤ X < 100	±0.15	±0.25	±0.5°		q,liu	zw,cheng	m,zhong	SCALE:
6	多溴二苯醚 (PBDE)	<800ppm	100 ≤ X < 300	±0.2	±0.3	±1°		DATE: 2015.01.14	DATE: 2015.01.14	DATE: 2015.01.14	SHEET
7	鎘,鉛,汞,六價鉻(包裝材料)	總含量<100ppm	300 ≤ X < 800	±0.3	±0.5	±1.5°		DATE: 2015.01.14	DATE: 2015.01.14	DATE: 2015.01.14	1 OF 1

THIRD ANGLE PROJECTION SHEET M/A4L