

DS-C30S-L104**LED Controller Board**

The video wall controller is mainly used for screen splicing control system, and is the core control device of the system. As a new-generation FPGA-based pure hardware image processing device, it adopts the dual data switching technology and the structure of main control board and service boards. It supports processing and transmitting large data, processing multiple high-definition and ultra-high-definition signals in real time, and managing multiple screens.

- Supports directly connecting to the LED screens via network cables.
- Supports 10.4 MP loading.
- Provides 1 audio port to allow 1 channel of audio output.
- Supports 444 video signal output.


▪ Specification

Model		DS-C30S-DEC
Chassis	Occupied Slot	Output slot
General	Packing List	4 × mini-DP to RJ-45 adapter cable
Video Output	Max. Video Output Resolution	4K
	Video Output Interface Type	4 × mini-SAS to twenty 1 Gbps electrical port (RJ-45); 2 × 10 Gbps optical port
	Video Output Interfaces	20
	Video Output Resolution	Width: 144 to 8192 Height: 144 to 4320 Loading resolution ≤ 10.4 MP
	Loading Capacity for Video Output to LED	Loading ≤ 10.4 MP Width: 144 to 8192 Height: 144 to 4320
Audio Output	Audio Output Interface Type	3.5 mm audio jack
	Audio Output Interfaces	1

▪ Available Model

DS-C30S-L104

▪ Dimension

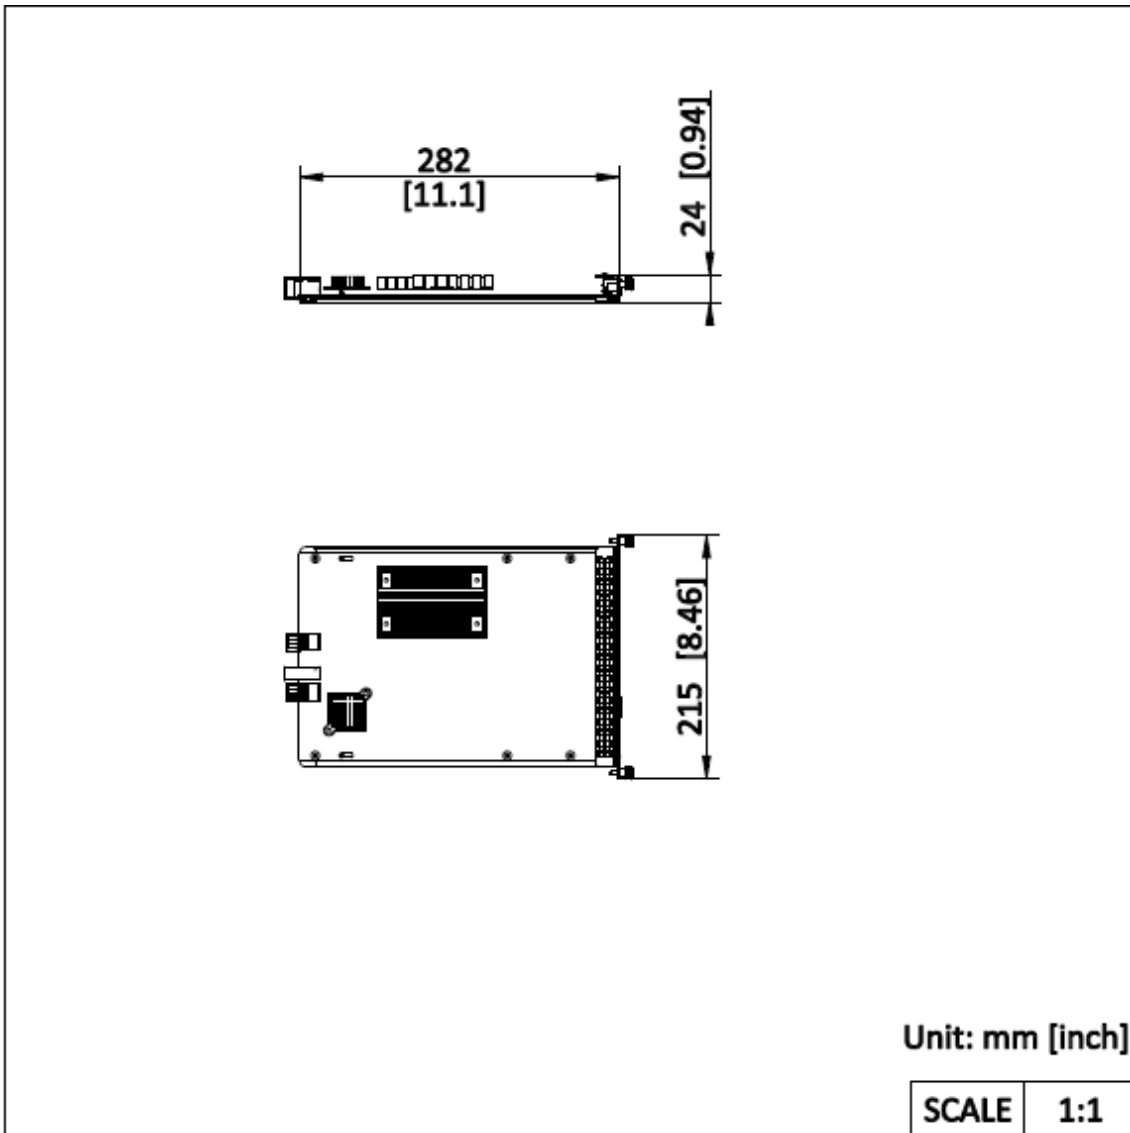

See Far, Go Further



www.hikvision.com
support@hikvision.com

