

DS-C60S-04HO**4-Channel HDMI Output Board**

As a new-generation FPGA-based pure hardware image processing device, the DS-C60S video wall controller (hereinafter referred as the device) supports the input, processing, and output of multi-channel HD and ultra-HD signals. The device adopts the structure of main control board, input boards, and output boards to achieve multi-screen management. The device is mainly used for large screen splicing control system, and is the core control device of the system.

- The HDMI output board provides 4 HDMI ports and supports YUV 444 output.
- Supports HDMI composite audio output.


▪ Specification

Model		DS-C60S-04HO
Chassis	Occupied Slot	Output slot
Video Output	Video Output Interface Type	HDMI 1.4
	Video Output Interfaces	4
	Video Output Resolution	1920 × 1200@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@60 Hz, 1680 × 1050@60 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1024 × 768@60 Hz Supports LED screen, custom resolution output, 60 Hz loading output, and 2.6 MP loading with width ranging from 288 to 3840 and height ranging from 288 to 2160.
	Max. Video Output Resolution	1080p
	Loading Capacity for Video Output to LED	2.6 MP loading per port, width in the range of 288 to 3840, height in the range of 288 to 2160.
Audio Output	Audio Output Interface Type	HDMI composite audio
	Audio Output Interfaces	4

▪ Available Model

DS-C60S-04HO

▪ Dimension

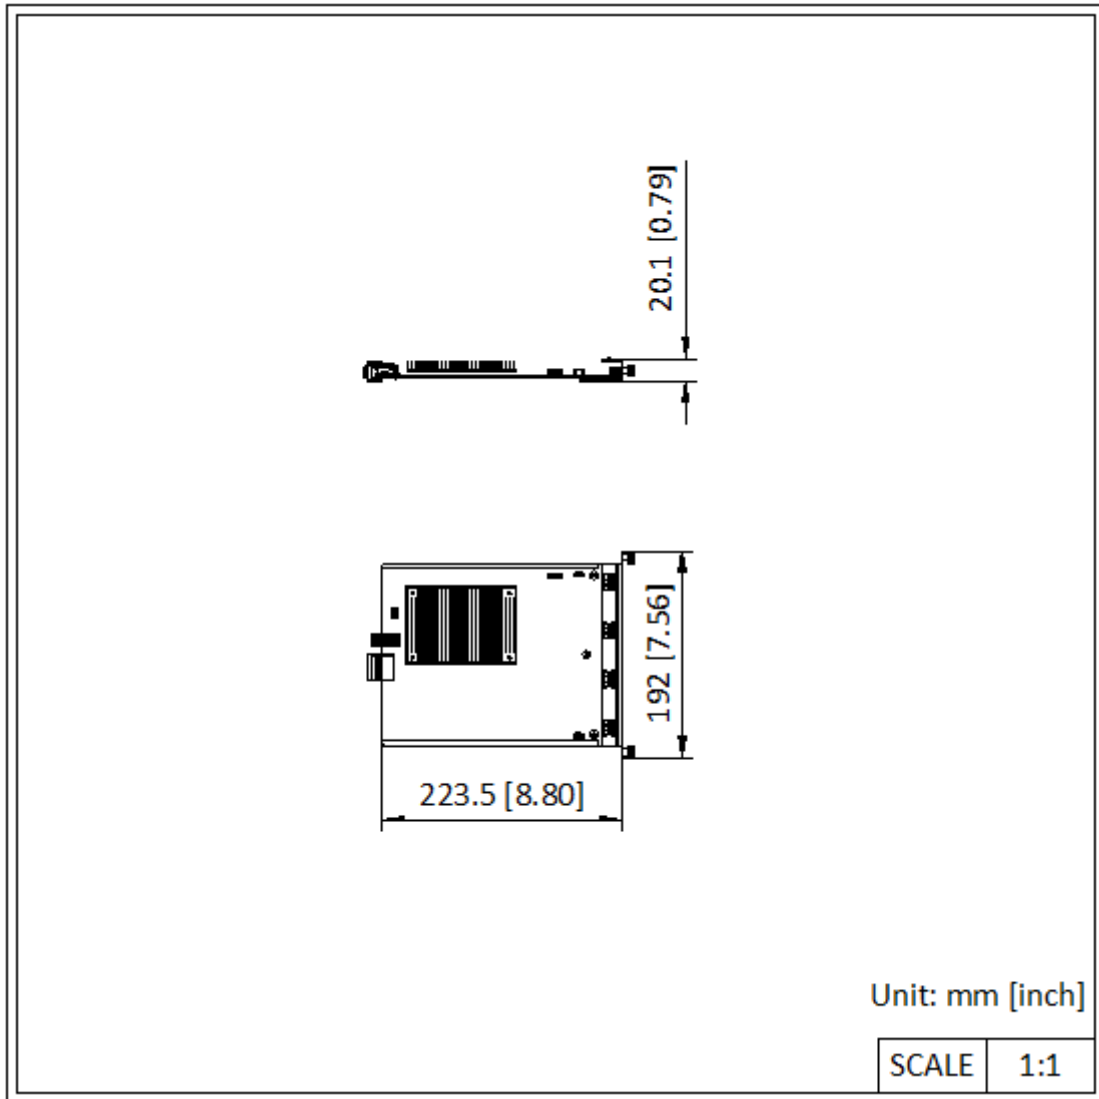

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq