

- Aluminum box structure design, box light, high flatness, support IP66 protection level, support front and back maintenance two maintenance methods
- Aluminum profile + aluminum shell, all metal aluminum box configuration, high heat dissipation efficiency
- Support automatic dehumidification, effective protection of long time or humid environment lamp bead
- Support wall type, floor type and other installation methods
- Adopt aviation plug design, installation and construction is simple and efficient
- Solder joint using lead-free non-toxic solder paste material, will not cause harm to human body and environment

• Specification

Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P3.9
Pixel Pitch	3.91mm
Module Component	1 × 2
Dimensions (W × H × D)	500 mm × 500 mm × 97 mm
Resolution	128×128
Area	0.25 m ²
Weight	9.12 Kg
Pixel Density	65536 dots/m ²
Lamp Board Housing	With housing
Cabinet Material	Aluminum Steel
Maintenance Method	Front and Rear maintenance
Cabinet Flatness	0.8 mm
Protection Level	IP66
Key Material	
Lamp Encapsulation	1921
Driver IC	DP3265S
Control System	Hikvision
Display	
White Balance Brightness	4500 nits
Color Temperature	9300K adjustable
Viewing Angle	Horizontal 160°, vertical 160°
Contrast Ratio	≥ 5000:1
Color Uniformity	≤ ± 0.003Cx, Cy
Brightness Uniformity	≥ 95%
Processing Performance	
Driving Method	Constant current driving
Frame Frequency	60 Hz
Refresh Rate	Up to 3840 Hz
Grey Level	Up to 14 bit
Power	
Power Supply	110~220 VAC ± 15%
Max. Consumption	≤ 650W/m ² (4500nits)
Average Consumption	≤ 210 W/m ² (4500nits)
Working Environment	
Working Temperature	-20 ℃ to 60 ℃ (-4 ℃ to 140 ℃)
Working Humidity	10%~80%RH
Storage Humidity	10%~90%RH
Storage Temperature	-20 ℃ to 60 ℃ (-4 ℃ to 140 ℃)
Relative Humidity	Notice: If used in the following scenarios, please communicate with headquarters for customization: 1) Seaside 2) Swimming pool 3) Ambient temperature ≤-40℃


General

Gross Weight	10.85KG/1 in 1
Package Dimension (W × H × D)	610mm x 165mm x 606mm
Lifespan	Lamp 100,000 hours

▪ **Available Model**

DS-D4239CD-1AAB 500*500/铝底壳铝箱

▪ **Dimension**

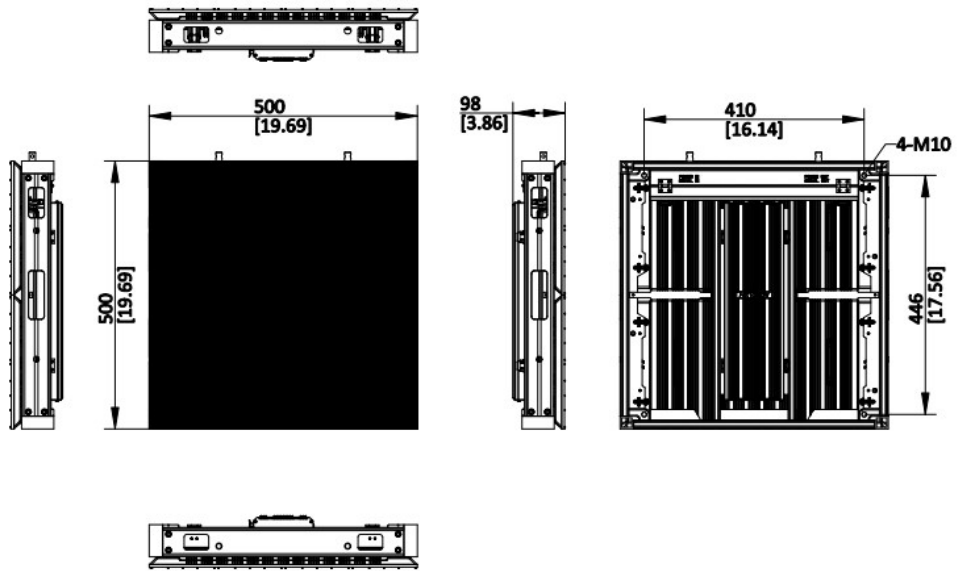







Unit: mm [Inch]

SCALE	1:2
-------	-----

▪ **Accessory**

▪ **Optional**

<p>DS-D4239CD-1AAB/M Module for DS-D4239CD-1AAB</p>	<p>MCP200WS-4.2A-B Power supply for DS-D42XXCD-1AAB</p>	<p>DS-D42CD-1AAB/R Receiving card for DS-D42XXCD-1AAB</p>	<p>DS-D42CD-1AAB/H HUB for DS-D42XXCD-1AAB</p>	<p>DS-D42-PC Power cable for DS-D42XXCD-1AAB</p>
				
<p>DS-D42-NC Network cable for DS-D42XXCD-1AAB</p>	<p>DS-D42-PC/NC Power cable and Network cable for DS-D42XXCD-1AAB</p>			
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

