

DS-PS403I-WB
Wireless Intercom Sounder Plus



The wireless internal sounder plus supports two-way audio function for ARCs to do the alarm verification, which can help users to know what is the real situation on-site immediately.

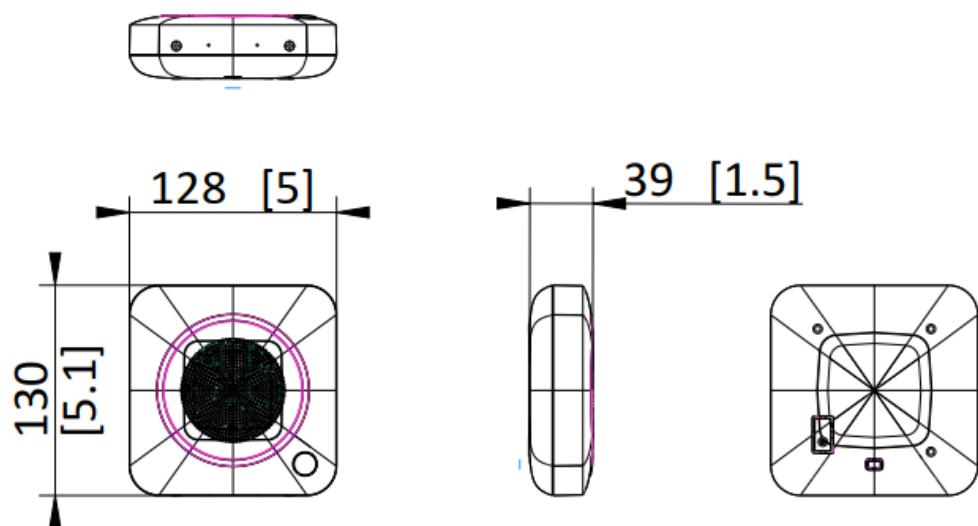
- Two-way audio communication
- Kinds of prompt sound and LED indications
- Fully remote configurable through APP

▪ Specification

Indication	
Voice prompt	Supported
Indication method	Acoustic and LED
	Adjustable
Sound volume level	Alarm: 105 dB max at a distance of 1 m Intercom: 85 dB max at a distance of 1 m
Alarm duration	Adjustable, 10 s–15 min
Indication of armed/disarmed status	Yes
Hardware features	
Tamper-Proof	Supported
Buzzer	Supported
Power switch	Power on/off
Mic	Supported
Audio	
Intercom	Two-way communication
Electrical characteristics	
Operation humidity	10% to 90% (no condensing)
Operation temperature	–10°C to 55°C
Battery type	4 × CR123A
Power supply	Support 12 VDC power supply
Power consumption	Quiescent current: 5 uA Max current: 1.6 A Voltage: 3 V
Battery life span	Up to 4 years (The battery working time can be significantly reduced at low temperatures)
Wireless transmission	
RF frequency	433 MHz
RF modulation	2GFSK
RF distance	800m (open area)
Wireless technology	CAM-X Wireless Technology
Display	
LED Indicator	Enrollment/Signal (red/green), Alarm(blue/red), Two-way audio service(blue/red)
General	
Dimension(WxHxD)	130 mm × 128 mm × 39.5 mm
Installation method	Wall-mounting
Color	White case (blue or red LED alarm)
Weight	355 g

▪ Available Model

DS-PS403I-WB

▪ Dimension

Unit:mm [inch]

SCALE	1:1
-------	-----

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq