

DS-SBOX-01 Outdoor Surveillance Box



- High strength Polymer Material (Flame Proof UL94-V0)
- Fast Deployment & Easy Installation for both pole and wall mounting
- Highly adaptable with Hikvision network cameras, PTZ, and network horn speakers
- Recommended for use with DS-1275ZJ-SUS mounting bracket when the pole diameter ranges from 67 mm to 127 mm
- IP66 & IK10 Protection


▪ Specification


General	
Material	PC/ASA; Hikvision White(RAL 9003)
Weight	2.5 kg (5.51 lb.)
Startup and Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 95% or less (non-condensing)
General Function	Loading Capacity of Front Panel: 8 kg (17.64 lb.)
Packing List	Security Box: ×1 Installation Back Plate: ×1 Pegboard: ×1 Shelf Board: ×1 Din Rail: ×2 Phillips Head Screw (M8 × 20): ×8 Phillips Head Screw (M8 × 12): × 2 Phillips Head Screw (M4 × 10): ×4 Self-Tapping Screw (M3 × 10): ×10 Hex Head Phillips Screw (M8 × 25): ×4 Hex Socket Screw (M6 × 25): ×4 Hexagon Socket Screwdriver: ×1 Cylindrical Pin (M4 × 40): ×4 Waterproof Cable Connector 1 (5 to 6.5 mm): ×1 Waterproof Cable Connector 2 (6.5 to 8 mm): ×1 Network Cable Piercing Accessories: ×1 Cable Gland (G3/4): ×1 Cable Gland (M20): ×2 Metal Strapping Band: ×3
Approval	
Protection	IP66, IK10

▪ Available Model

DS-SBOX-01

▪ Dimension

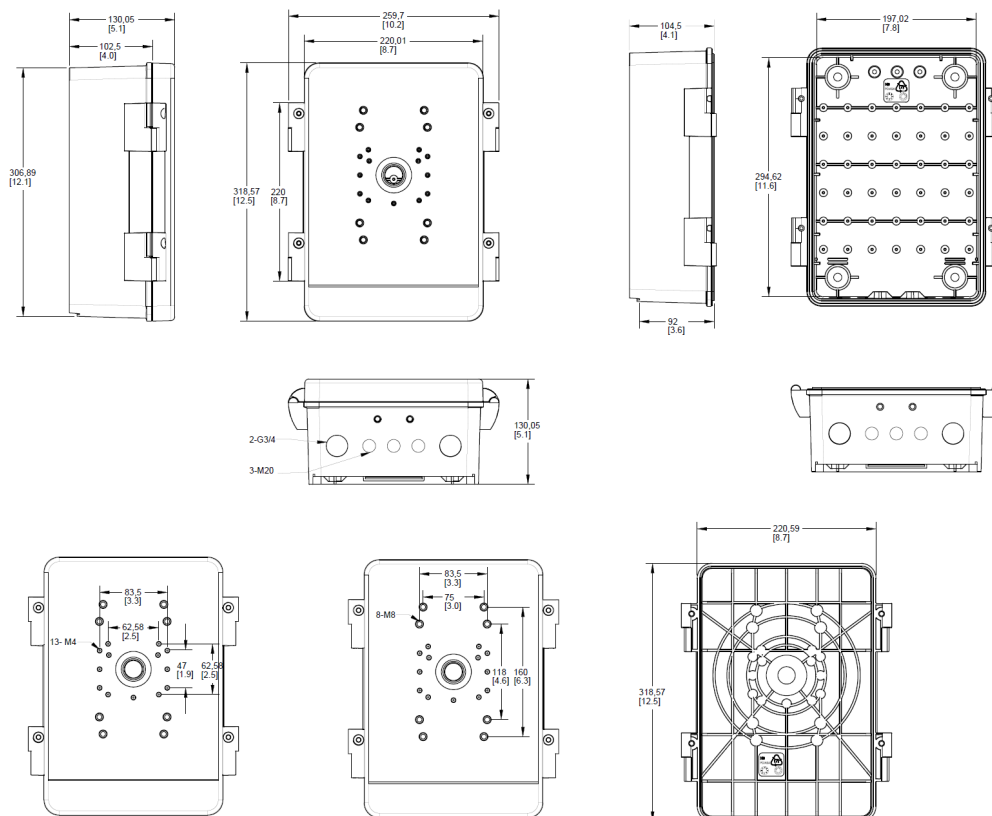

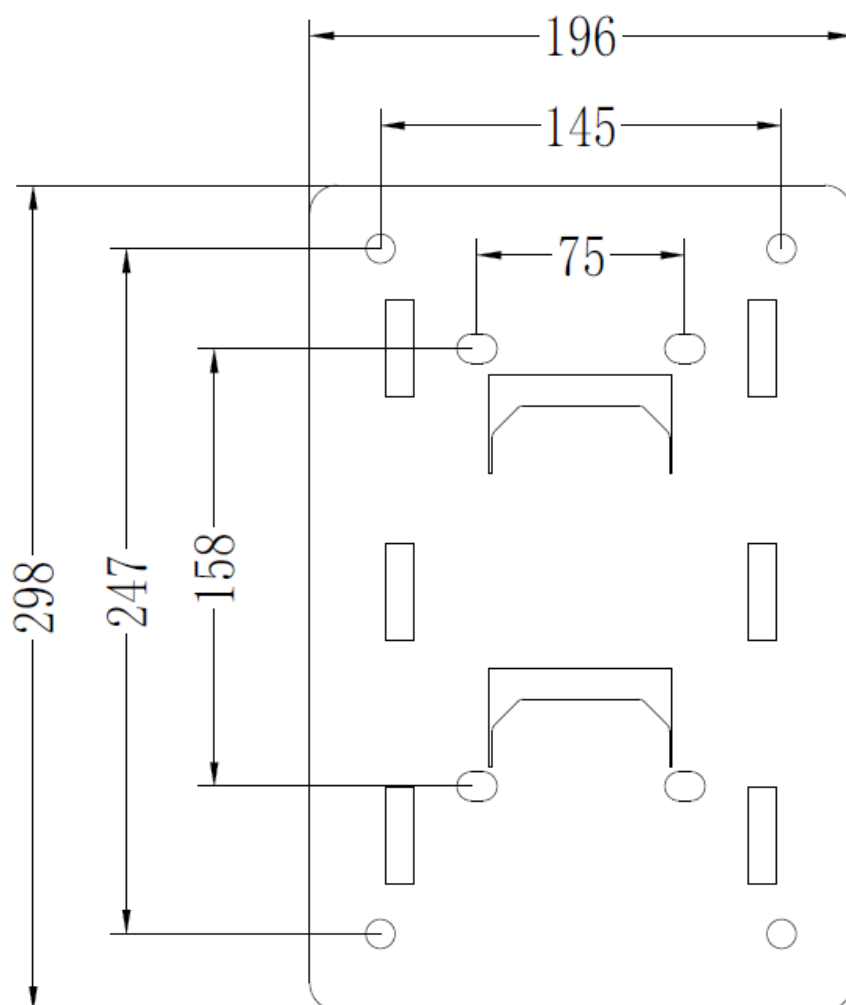

▪ Accessory



DS-1618ZJ



DS-1602ZJ



DS-1260ZJ



DS-1280ZJ-XS



DS-QAZ1307G1T-E(C)



DS-1280ZJ-DM21



DS-1276ZJ-SUS



DS-1280ZJ-DM46



DS-4603ZJ-WA



DS-1280ZJ-DM8



DS-1280ZJ-DM45



DS-1275ZJ-SUS

See Far, Go Further



www.hikvision.com
support@hikvision.com

