

## DS-1350HM(AE) Voice intercome unit



- Independent audio processing chip, full duplex voice intercom, high fidelity, clear sound quality and low noise
- Multi level volume adjustment, physical buttons, supports 3 levels of volume adjustment to control the output sound level
- Built-in mic, supports external MIC with a standard 3.5mm connector
- Integrated design, small and light, easy to install and maintain


## ▪ Specification

Interface	
Output interface definition	1-LINE IN; 2-LINE OUT; 3-DC12V; 4-GND
Output interface type	4Pin aviation head (female head)
General	
Nominal voltage	DC12V
Working temperature	-10°C~+55°C
Working humidity	10%~95%
Intercom mode	full duplex
Input impedance	2.2K
Application	It is suitable for bus, school bus, taxi and other vehicle monitoring scenarios
Built-in Microphone	yes
Built-in Speaker	yes
Dimension	Φ85mm (Diameter) × 26mm (Height)


## ▪ Available Model


DS-1350HM(AE)  
 DS-1350HM(AE)(1m/4pin)  
 DS-1350HM(AE)(DVS Kit)  
 DS-MP1301(AE)(DVS Kit)

## ▪ Dimension

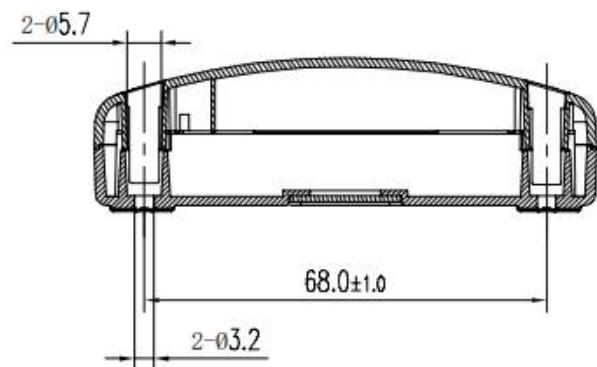

Section A-A

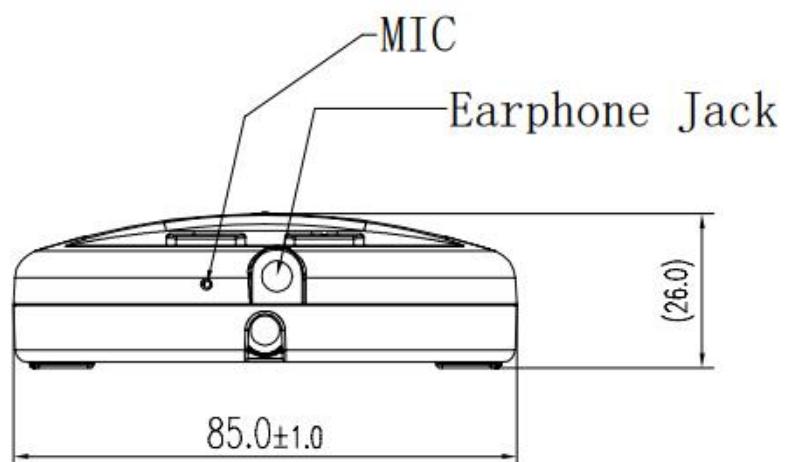

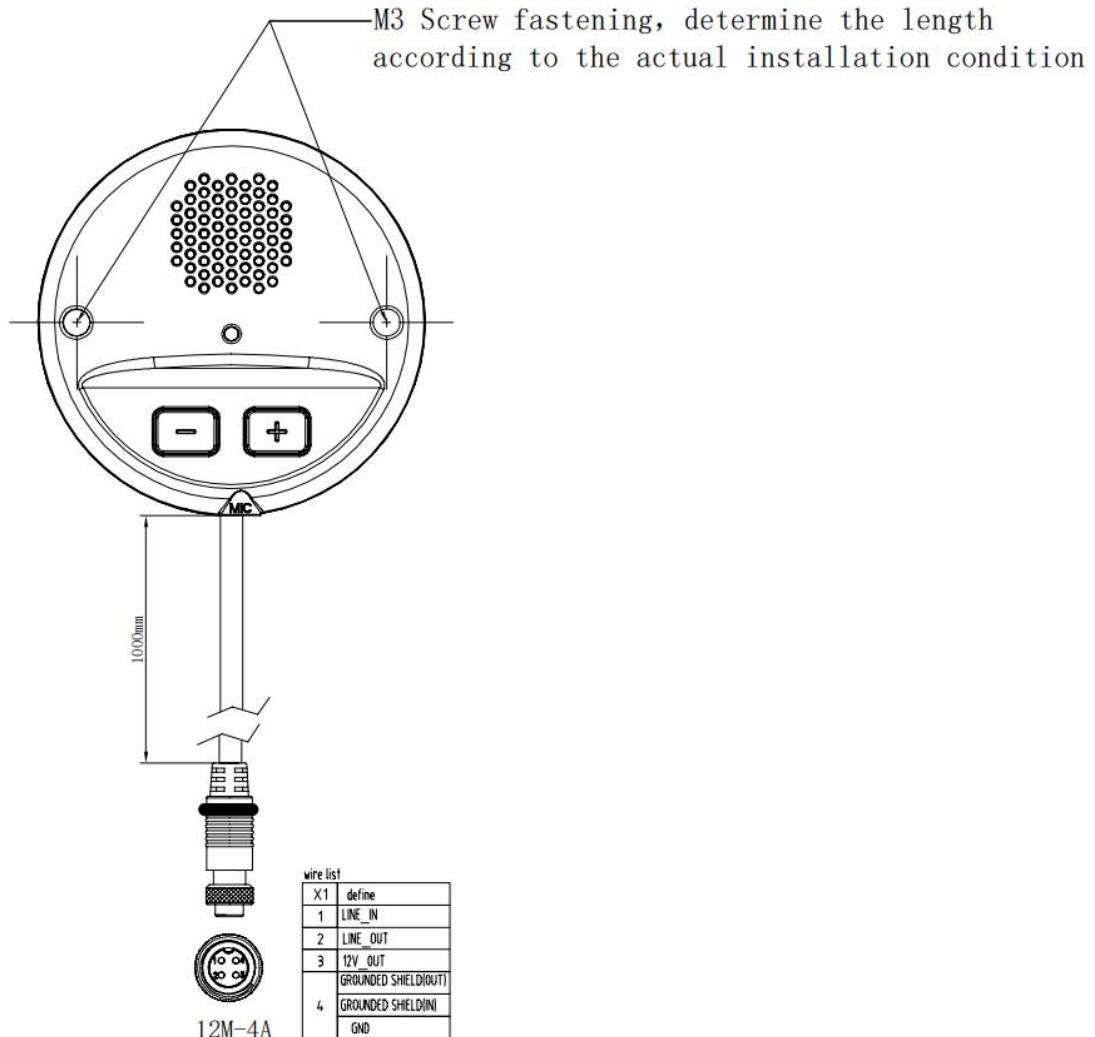

- **Accessory**

- **Included**





# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**