

## iDS-7316HUHI-M4/S(S) 16-ch 5MP 1.5U H.265 AcuSense DVR



- Deep learning-based perimeter protection
- Deep learning-based motion detection 2.0 for all analog channels
- Up to 16-ch analog camera inputs and 4 SATA interfaces
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- Up to 8 MP@8 fps/5 MP@12 fps encoding capability
- HDTV/ AHD/ CVI/ CVBS/ IP video inputs
- Up to 34-ch network camera inputs
- POS triggered recording and POS information overlay
- Up to 16-ch HDTV Audio over coax (audio by coaxitron)

## ▪ Function

### Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Full channel recording at up to 8 MP resolution

### Storage and Playback

- 4 SATA interfaces and 1 eSATA interface
- 16-ch 1080p@30 fps decoding capability
- RAID 0, RAID 1, RAID 5, RAID 6 and RAID 10 storage scheme

### Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Output bandwidth limit configurable

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

## ▪ Specification

Motion Detection 2.0	
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported;
Perimeter Protection	
Human/Vehicle Analysis	Up to 8-ch, for channel 1/2/3/4/9/10/11/12 only
Video and Audio	
IP Video Input	18-ch (up to 34-ch) Up to 12 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras
Analog Video Input	16-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI Input	3K, 4 MP, 1080p25, 1080p30, 720p25, 720p30
AHD Input	4 MP, 1080p25, 1080p30, 720p25, 720p30
HDCVI Input	1080p25, 1080p30, 720p25, 720p30
CVBS Input	PAL/NTSC
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
HDMI 1 Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
HDMI 2 Output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Video Output Mode	HDMI1/VGA simultaneous output, HDMI2/VGA independent output
Audio Input	4-ch, RCA (2.0 Vp-p, 1 KΩ)
Audio Output	2-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (independent)
Synchronous Playback	16-ch
Recording	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding Resolution	8 MP/3K/5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame Rate	Main stream: 8 MP@8 fps/3K@12 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N)
Video Bitrate	32 Kbps to 10 Mbps
Dual-stream	Support
Stream Type	Video, Video & Audio
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Network	
Total Bandwidth	320 Mbps
Remote Connection	128




Follow us on social media to get the latest product and solution information.

Network Protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP
Network Interface	2, RJ45 10M/100M/1000M self-adaptive Ethernet interface
<b>Auxiliary Interface</b>	
SATA	4 SATA interfaces
eSATA	Support
Capacity	Up to 12 TB capacity for each disk
Serial Interface	RS-232, RS-485 (full-duplex), keyboard
Alarm In/Out	16/4
USB Interface	Front panel: 2 × USB 2.0 Rear panel: 1 × USB 3.0
<b>General</b>	
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 35 W (without HDD)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	445 × 400 × 71 mm (17.5 × 15.7 × 2.8 inch)
Weight	≤ 5 kg (without HDD, 11.0 lb.)

## ▪ Physical Interface

No.	Description	No.	Description
1	Audio in	9	RS-232 interface
2	Video in	10	eSATA interface
3	Audio out	11	LAN1 and LAN2 interfaces
4	Line in	12	Alarm out, alarm in, RS-485, and keyboard
5	USB interface	13	GND
6	Video out	14	Power supply
7	HDMI2 interface	15	Power switch
8	HDMI1 and VGA interfaces		

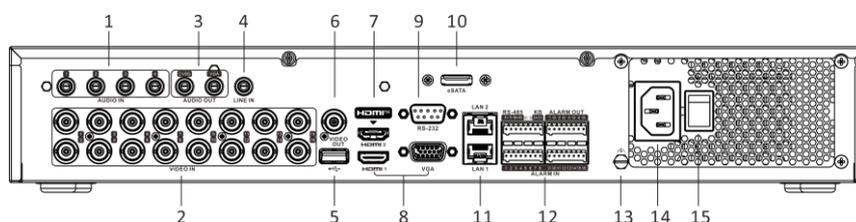

### Headquarters


No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Dimension**

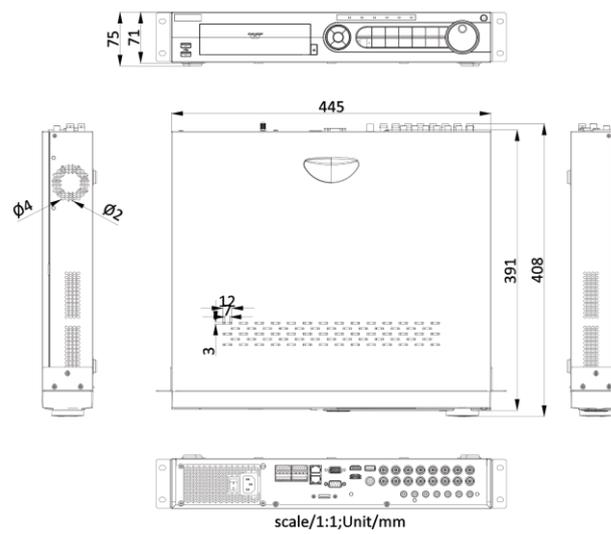

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

