

HF-GP110 Combustible Gas Detector



The Standalone Liquefied Petroleum Gas Alarm provides the users an early alert, when the natural gas leakage in the protected area reaches the alarm concentration

- Support multiple function, alarm, test, silence, fault and malfunction.
- Support log saving function, record alarm, alarm recovery, fault, fault recovery, sensor failure and other types of logs.
- Support valve output and fan output.


▪ Specification

Model		HF-GP110
Detector	Alarm Volume	70dB~115dB @1m(A-weighted)
	gas type	C3H8
	Measuring range	0~25%LEL
Function	Alarm threshold	10%LEL
Interface	Output Signal	1-way solenoid valve output interface, 1 way exhaust fan output interface
General	Working principle	Catalytic combustion
	Power supply	AC 220 V
	Protection Level	IP 30
	Environment	Temperature: -10 °C~55 °C; Humidity: ≤93% (40 °C, non-condensing)
	Dimension (φ × H)	122 mm × 77 mm × 34 mm
	executive standard	GB 15322.2-2019

▪ Available Model

HF-GP110

▪ Dimension

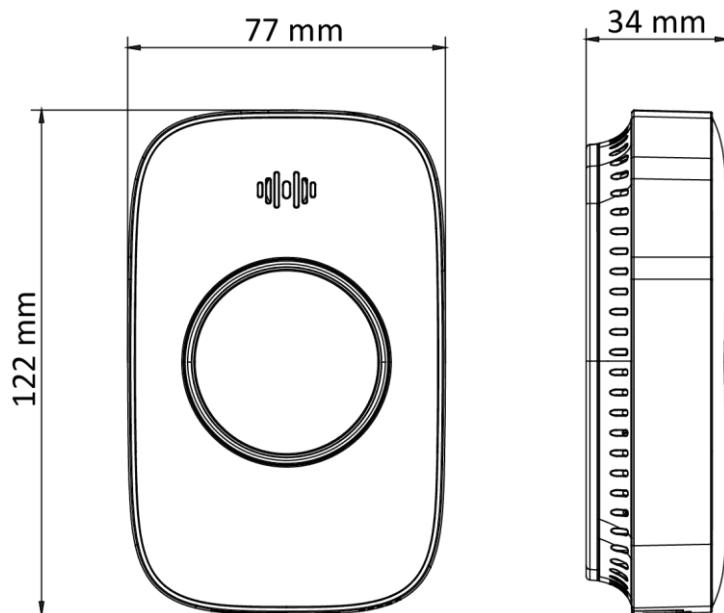

Headquarters

Address: Room 311, Unit B, Building 2, No.399,

Danfeng Road, Binjiang District, Hangzhou City,

Zhejiang Province, China

Tel: 0086 400-800-5998

www.hikvision.com

Safer Place Better Life