

ISD-SMG218L Walk-though Metal Detector



- Anti-interference: Set the frequency according to the surrounding environment to avoid interference, and multiple doors can be used normally when they are more than 20 cm side by side.
- Detection Accuracy: One coin-size metal (approx. 25mm) can be effectively detected and there are not omission and cross reporting.
- Throwing Objects Detection: Support detecting the metal object that are throwing through the detector.
- Frequency Adjustment: Various frequencies are programmable to reduce the ambient interference.
- Sensitivity Adjustment: Sensitivity (999 levels) can be adjusted according to the size of the metal to be detected.
- Multi-Zone Alarm: Metals that are located at different area can be detectable simultaneously.
- Network Connectivity: Allow user use a web browser to edit remotely the configuration parameter of the device.
- People Counting: Bi-lateral IR sensor can accurately detect the number of people passing through the detector.
- Positioning Light: Two doorposts are equipped with LED light bar, can intuitively display the area where prohibited items are located.
- Power-On Self-Diagnosis: When the device is power on, the system will start automatically to test itself and display the results.
- Display: Support a 7-inch LCD color screen, can display important information such as alarm zones, passage numbers, alarm numbers, time / date etc.
- Ultra-Low Detection Height: Can detect metals located higher than 1 cm above the ground.
- Remote Control: Support controlling remotely via the infrared remote controller unit or web browser and make users more convenient to operate.
- Modular Design: The components are modular designed and are easy to maintenance and transport.


▪ Specification

Display type and size	7 inch LCD
Detection zones	1\6\11\12\18 zone(s)
Self diagnostic	Supported
Package dimension	Case Package: 825 mm × 320 mm × 260 mm Planks Package: 2320 mm × 640 mm × 260 mm
Dimension Parameters	
Tunnel Size	1980 mm × 710 mm × 501 mm(H × W × D)
Dimension	2225 mm × 845 mm × 579 mm (H × W × D)
Specification Parameters	
Weight	Bare Weight: 52 kg Case Weight (includes Package): 14 kg Planks Weight (includes Package): 46 kg
Consumption	24 W
Power	100-240V~, 50/60Hz, 1A Max
Operating Temperature	-10 °C to 55 °C
Operating Humidity	≤95% (No Condensation)
Device Interface	
Network Interface	1
Power Interface	1
Alram Output	2 output interfaces

▪ Available Model

ISD-SMG218L

▪ Dimension

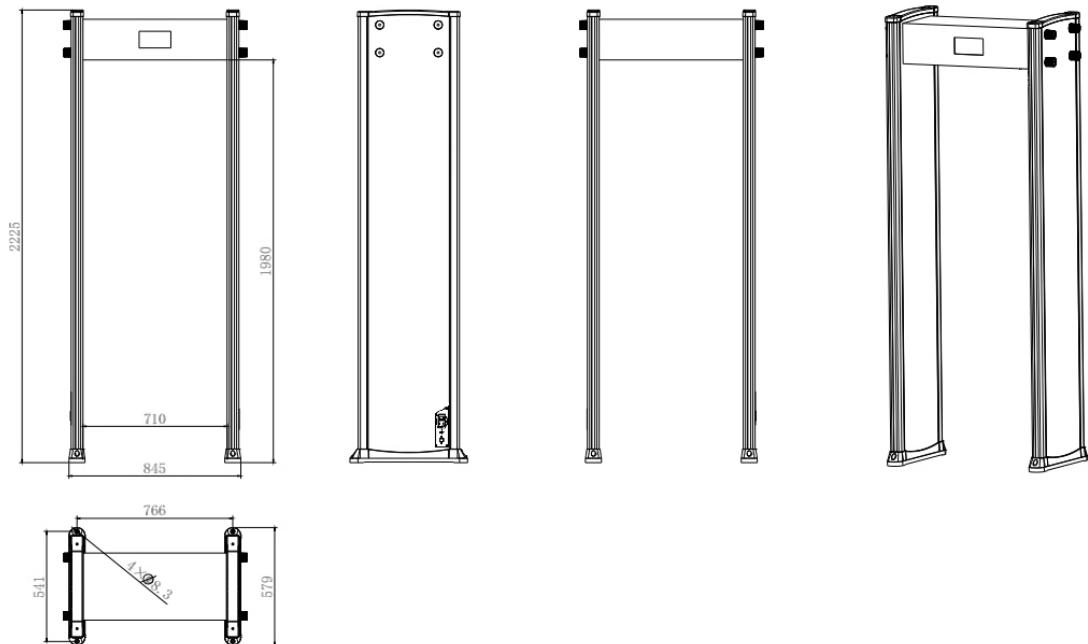

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®