

DS-2XE2601-1-Y(SS)
Explosion Proof Flexible Conduit



- The main materials are braided line, carbon steel, and NBR. Connector is made by 316L Stainless Steel.
- Suitable for cable protection in explosion-proof scenarios.
- II 2 G II 2 D Ex eb IIC Gb Ex tb IIIC Db

▪ Specification


General

Material	Cover: PTFE, main body: Q235 ,Connector Material: 316L
Dimension	$\varnothing 25$ mm \times 1000 mm . Thread Specification: G-3/4 Female and Male threads on two Sides
Weight	Approx 1.2kg
Startup and Operating Conditions	-40 °C to 60 °C . Humidity 95% or less (non-condensing)
Approval	
Protection	IP68(2m/2h)
Explosion-proof sign	IECEEx DNV 24.0038U Ex eb IIC Gb Ex tb IIIC Db DNV 24 ATEX 82754U II 2 G Ex eb IIC Gb II 2 D Ex tb IIIC Db

▪ Available Model

DS-2XE2601-1-Y(SS)

▪ Dimension

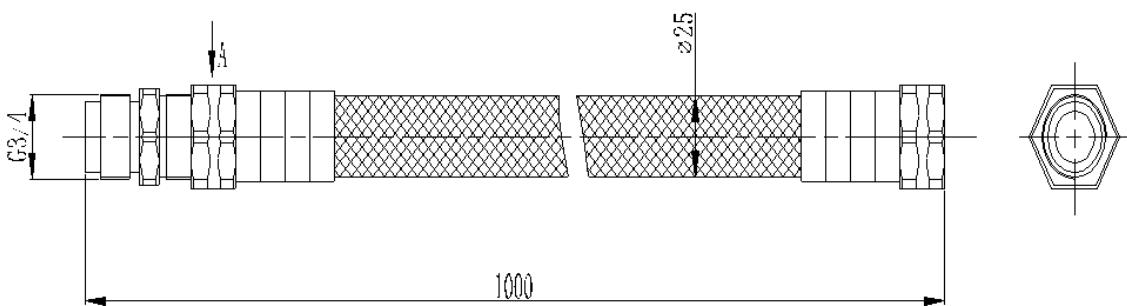

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®